

Specification

Product Name: Casmbi Bluetooth Network PIR Sensor
DAI

Product Model: MDA182D IR B1

| Versions | Release/ change Date | Reason | Publishing |
|----------|----------------------|--------|------------|
| V1.0 | 2025.04.30 | | James.Guo |
| | | | |
| | | | |
| | | | |

【Product Feature】

- International standard Zhaga book20 interface
- 4 meters maximum installation height
- 5 years warranty
- Suitable for Open offices, Individual Offices
- PIR motion detector, daylight sensor function
- Casambi Bluetooth module, connected with casmbi App platform
- Output DALI dimming signal



【Parameters】

| Input | |
|----------------------------|---|
| Rated voltage | 12±1VDC |
| Operating current | 35±5mA |
| Ripple voltage | <100mVp-p |
| output | |
| Output signal | DALI dimming |
| Sensor parameters | |
| Detection mode | PIR detection |
| Detection area | Casambi APP set |
| Hold time | Casambi APP set |
| Daylight sensor | Casambi APP set |
| Daylight priority | Casambi APP set |
| Dimming level | Casambi APP set |
| Detection range (radius) | Ceiling installation 3m high Motion and minor motion: r≥2.5m Test condition: 100% sensitivity, 60 m ² indoor open space |
| Installation height | Typical 3m (4m Max), see note 1 & 2 |
| Wireless parameters | |
| BLE Module | Casambi Bluetooth |
| Working Frequency | 2.402-2.480GHz |
| Transmitting Power | +7dBm(max) |
| Transmitting Distance | Point to point transmit 25m Max |
| Fixture ID | |
| Environment | |
| Working temperature(Ta) | -20℃-55℃ |
| Storage temperature | -40℃~+80℃ Humidity: ≤85% (non-condensing) |
| Certification standards | |
| Certified | CE |
| Environmental requirements | Comply with RoHS 2.0, Reach requirements |
| IP Rating | IP20 |
| Other | |
| Wiring | 2 pin PH2.0 terminal |

| | |
|---------------------------|-------------------------------|
| Installation requirements | Zhaga book20 installation |
| Packaging requirements | Clapboard + Carton(K=A) |
| Net weight | 15.8±3g |
| Lifetime | 5 years warranty @Ta (indoor) |

Note:

1. When ambient temperature approaches the human body temperature range (36°C~37°C/96.8~98.6°F), PIR motion detection will significantly weaken or non-responsive.
2. When ambient temperature or LED tray temperature is higher than 55°C/131°F, false triggering may happen, please try to reduce detecting sensitivity to improve. If stays false triggering, the PIR sensor should not suitable to be used in the space.

【Function description】


- ON/OFF function Casambi App setting
- 2-step dimming function Casambi App setting
- 3-step dimming function Casambi App setting
- Daylight harvesting Casambi App setting
- Daylight priority Casambi App setting
- Network function Casambi App setting

Features and operations are detailed:

<https://support.casambi.com/support/solutions/articles/12000074041-presence-sensors>


【Product Information】

- Dimension (Unit: mm)

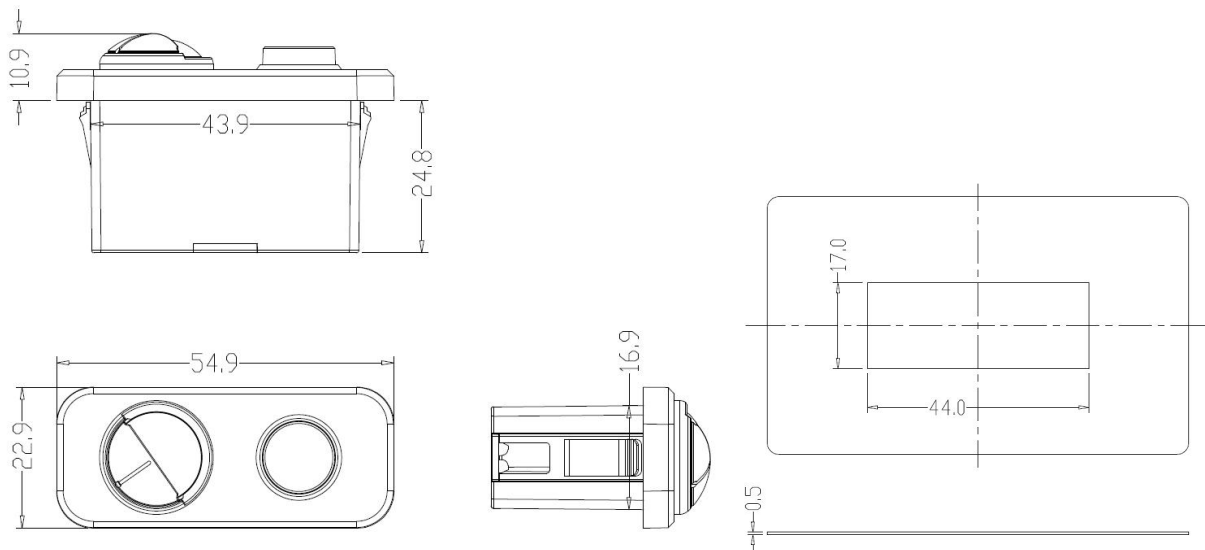


Cut-hole size


● Function

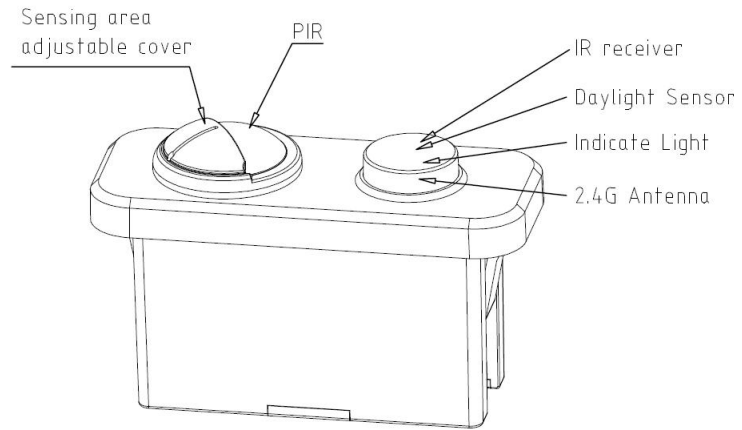


● Wiring

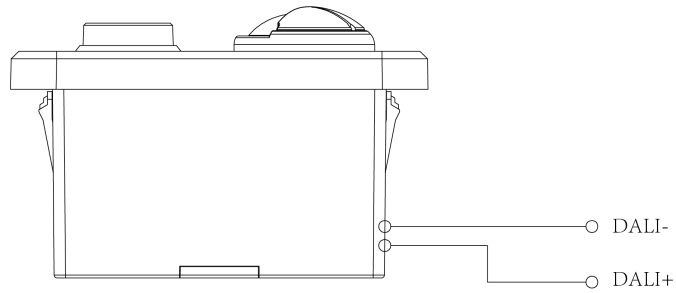

● Installation Instruction

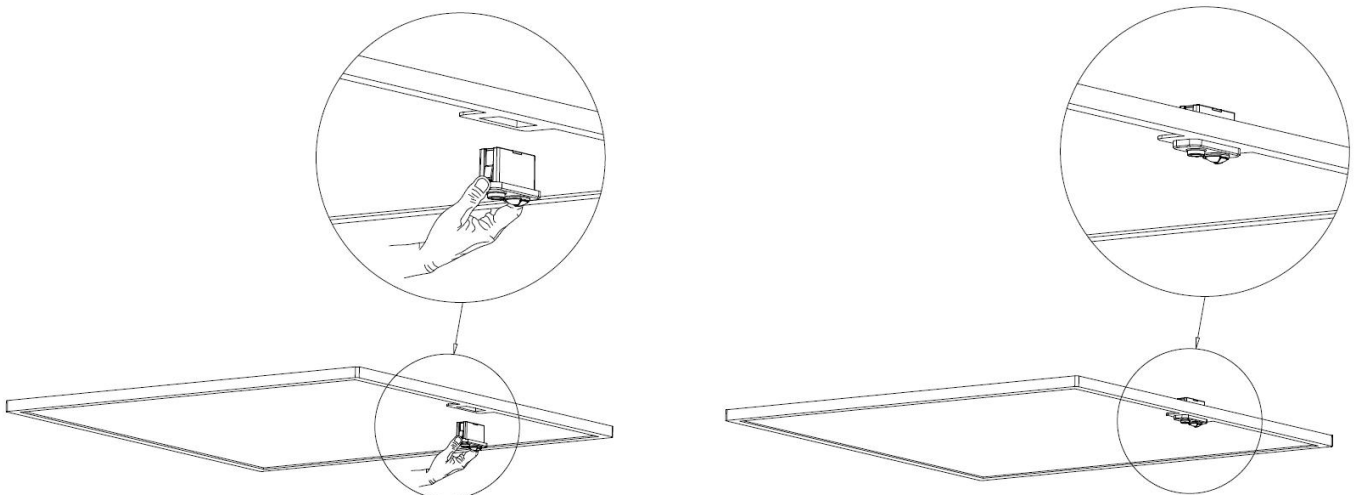

【Detection Range】

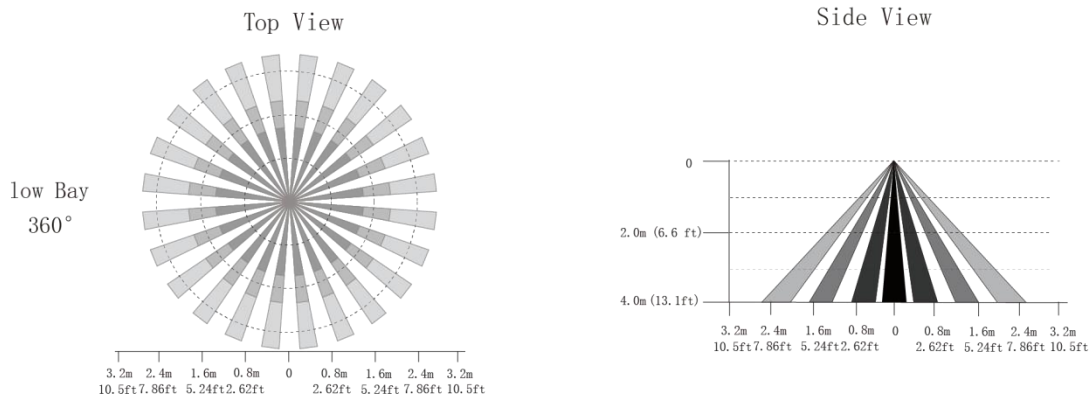

【Initialization】

After switch on power, sensor will be warmed 45-60s then start to work.

【Default setting】

Sensitivity: 100%, Hold time: 5s, Daylight sensor: Disable, Stand by period: 0s, Stand by DIM Level: 10%

【Application Notice】

- The sensor should be installed by a professional electrician. Please turn off the power before installing, wiring and changing parameters.
- PIR sensor can't penetrate any materials, please make sure no obstacle between sensor and moving people/object.
- Sensor may hard to detect people if wear thick clothes in cold winter.
- Heat signals will be regarded as moving signals to trigger the sensor. Avoid facing sensor to air condition or other heating source.
- Sensor is for indoor use only. Outdoor sunlight could affect the detection of sensor.
- Due to continuous improvement, the contents of this instruction could be changed without prior notice.
- The dimming performance could be different when work with different 0-10V drivers.
- The daylight threshold is measured in a sunny environment without shadow and ambient light diffuse reflection. Ambient lux level could be different in different environment, weather, climate, time-of-day and season.
- Detection distance is related to height of people, mounting height, mounting angle, working environment temperature and etc. When ambient temperature approaches the human body temperature range (36°C~37°C/96.8~98.6°F), PIR motion detection will significantly weaken or non-responsive. When ambient temperature or LED tray temperature is higher than 55°C/131°F, false triggering may happen, please try to reduce detecting sensitivity to improve. If stays false triggering, the PIR sensor should not suitable to be used in the space.
- Given detecting area is typical value that was measured by 165cm high testers in an indoor open environment.

- This product have to use with voltage-stabilized DC power supply whose input voltage is stable and ripple factor is low(ripple factor is lower than 100mV; load current is greater than 25mA).
- When installing in new environment, please install and test at least 5pcs product firstly before mass installation.
- PIR is a pyroelectric infrared sensor that detects changes in infrared rays. Pls pay attention to the following matters during actual use, such as: detecting heat sources other than the human body, the temperature of the heat source does not change or the heat source does not move, and other related environmental factors and violations of the PIR application principle impact.
- When detecting heat sources other than the human body due to the following phenomena, the PIR may be falsely triggered.
 1. When small animals enter the detection range
 2. When far-infrared rays from sunlight, car headlights, incandescent lamps, etc. are directly exposed to the sensor
 3. When the temperature in the detection range changes drastically due to warm air, cold air from cold greenhouse equipment, water vapor from humidifiers, etc.
- When detecting heat sources due to the following phenomena, the PIR may not trigger
 1. When there are substances such as glass and acrylic that block the transmission of far-infrared rays between the sensor and the detection object.
 2. The heat source within the detection range hardly moves or moves at high speed.