
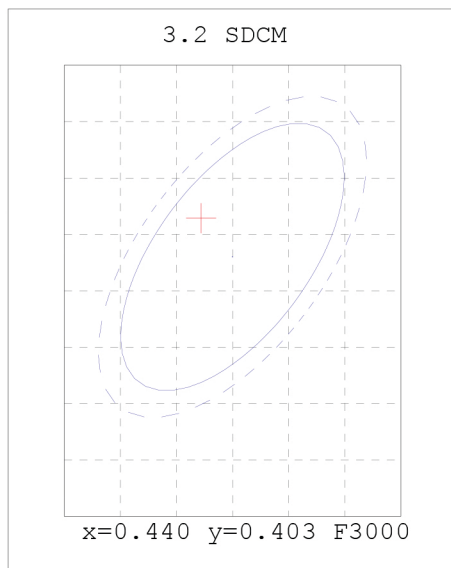


Light Source Test Report

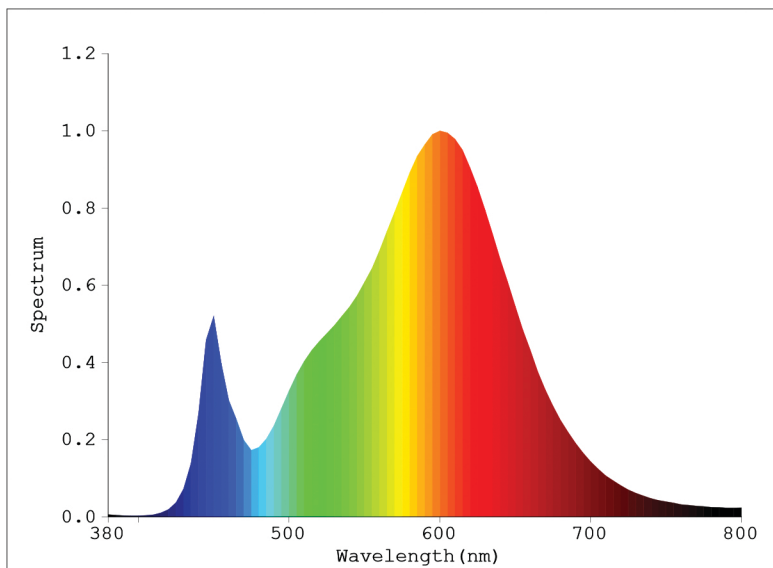

Color Parameters:

Chromaticity Coordinate: $x=0.4372$ $y=0.4064$ $u'=0.2497$ $v'=0.5223$

Tc=3015K Dominant WL:Ld=582.4nm Purity=53.2% Centroid WL:588.0nm

Ratio:R=24.2% G=73.6% B=2.2% Peak WL:Lp=600.0nm HWL:122.8nm

Render Index:Ra=80.5

R1 =78 R2 =89 R3 =96 R4 =78 R5 =79 R6 =87 R7 =82

R8 =55 R9 =-3 R10=76 R11=77 R12=69 R13=81 R14=98 R15=70

Photo Parameters:

Flux: 6520.6 lm Fe: 19.573 W Efficacy:115.0 lm/W

LEVEL: WHITE:OUT

Electrical Parameters:

Luminaire: U=218.0V I=0.2690A P=56.70W PF=0.9630

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]

REF=46935 (R=3)

%=0.736%

Ip=13387 (G=3,D=53)

PMT: 32.1 centigrade [150.0]

QYL20160504

Product Type:PL3060WW
Number:174
Temperature:25.3 deg
Test Operator:L
Software:V2.00.100

Manufacturer:台创照明
Test Department:台创照明
Humidity:65.0%
Test Date:2016-05-26 15:17:05
Instrument:PMS-80_V1 (SN:1008070)