


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm		
NAME: SmartEdge-18W-CPTC	TYPE:3000K 18W	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:0.174*0.174	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.13 lm/W			
MODEL		I _{max} (cd)	549.2	S/MH(C0/180)	1.24
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	1566.5	η UP,DN(C0-180)	1.0,47.7
NOMINAL FLUX(lm)	1566.55	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,50.6
LAMPS INSIDE	1	η up(%)	1.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	231.1	η down(%)	98.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

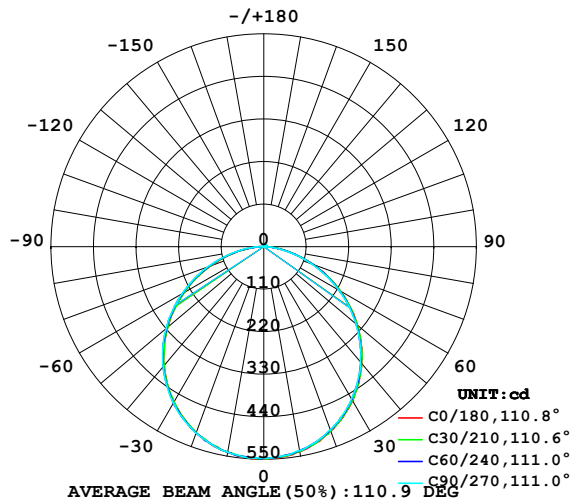

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

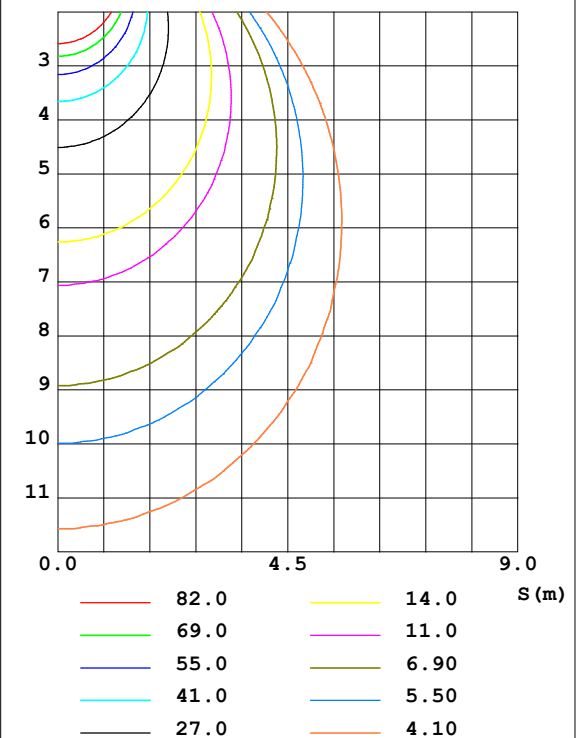

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	538.2	536.6	535.7	534.8	539.8	539.5	539.4	539.9	0- 10	51.80	51.80	3.31,3.31
20	507.3	505.4	503.9	502.3	512.0	512.2	513.0	513.3	10- 20	148.3	200.1	12.8,12.8
30	460.3	457.0	454.8	453.0	464.1	465.8	467.2	468.2	20- 30	224.3	424.4	27.1,27.1
40	394.2	392.1	388.9	386.4	400.3	402.6	405.2	406.6	30- 40	269.5	693.9	44.3,44.3
50	316.7	313.8	311.5	308.3	324.6	326.3	330.0	331.9	40- 50	277.8	971.7	62,62
60	227.9	225.6	224.0	220.3	237.9	240.2	245.0	246.1	50- 60	248.3	1220	77.9,77.9
70	136.9	134.9	132.5	129.4	146.5	149.6	154.3	155.6	60- 70	186.1	1406	89.8,89.8
80	51.91	51.69	48.61	46.69	60.93	62.99	68.01	68.87	70- 80	104.3	1510	96.4,96.4
90	4.300	4.520	4.637	4.477	3.648	4.261	4.586	6.680	80- 90	28.37	1539	98.2,98.2
100	3.970	4.246	4.314	4.345	2.943	2.869	2.805	2.882	90-100	4.030	1543	98.5,98.5
110	4.355	4.529	4.632	4.588	3.261	3.136	3.180	3.172	100-110	3.901	1547	98.7,98.7
120	4.681	4.830	4.906	4.939	3.648	3.584	3.578	3.594	110-120	4.011	1551	99,99
130	5.004	5.121	5.110	5.212	4.121	4.099	4.084	4.087	120-130	3.960	1555	99.2,99.2
140	5.324	5.402	5.451	5.448	4.663	4.623	4.613	4.597	130-140	3.723	1558	99.5,99.5
150	5.647	5.698	5.710	5.735	5.198	5.155	5.169	5.138	140-150	3.274	1562	99.7,99.7
160	6.026	6.062	6.084	6.065	5.777	5.707	5.755	5.691	150-160	2.611	1564	99.9,99.9
170	6.308	6.315	6.335	6.315	6.175	6.151	6.210	6.139	160-170	1.717	1566	100,100
180	6.451	6.431	6.497	6.420	6.464	6.431	6.505	6.424	170-180	0.6039	1567	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm		
NAME: SmartEdge-18W-CPTC	TYPE:3000K 18W	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:0.174*0.174	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.99	.96	1.01	.97	.94	.97	.93	.90	.92	.90	.87	.89	.86	.85	.82
2.0	.90	.84	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.45	.55	.49	.45	.43
6.0	.56	.48	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.45	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.32	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

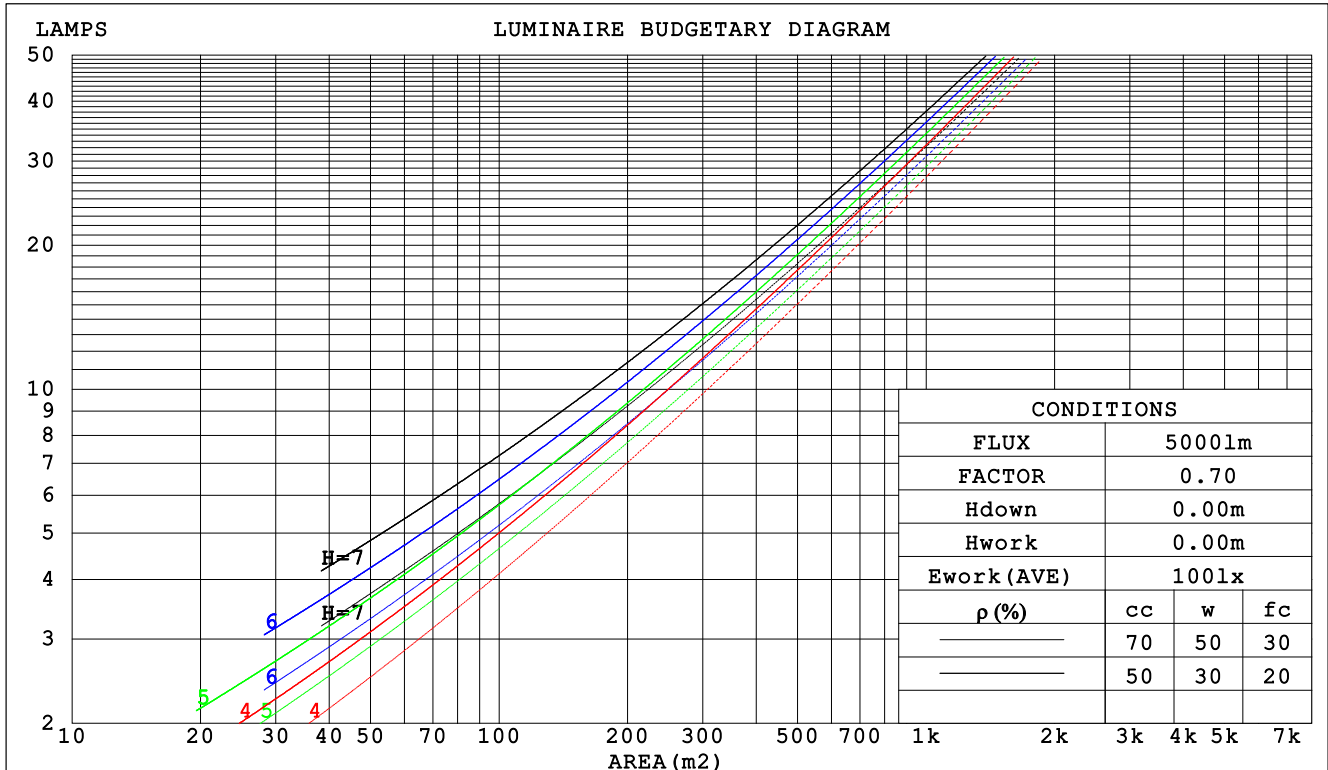

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm								
NAME: SmartEdge-18W-CPTC				TYPE:3000K 18W			WEIGHT:	
DIM.:				SPEC.:			SERIAL No.:1	
MFR.: EVERFINE				SUR.:0.174*0.174			PROTECTION ANGLE:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.307	.174	.055	.299	.171	.054	.285	.163	.052	.272	.157	.050	.260	.150	.048		
2.0	.289	.158	.049	.282	.155	.048	.269	.150	.047	.258	.145	.045	.247	.140	.044		
3.0	.268	.142	.043	.262	.140	.042	.250	.136	.041	.240	.132	.040	.230	.128	.039		
4.0	.247	.128	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035		
5.0	.229	.117	.034	.224	.115	.033	.215	.112	.033	.207	.109	.032	.199	.106	.032		
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029		
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.174	.090	.027		
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.163	.084	.024		
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.154	.078	.023		
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.194	.170	.148	.166	.146	.128	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.186	.146	.112	.159	.125	.097	.109	.087	.068	.063	.050	.040	.020	.016	.013	
3.0	.178	.128	.088	.152	.111	.077	.105	.077	.054	.060	.045	.032	.019	.015	.010	
4.0	.170	.115	.072	.146	.099	.063	.100	.069	.044	.058	.040	.026	.019	.013	.009	
5.0	.163	.104	.061	.140	.090	.053	.096	.063	.038	.056	.037	.022	.018	.012	.007	
6.0	.156	.096	.053	.134	.083	.046	.092	.058	.033	.054	.034	.020	.017	.011	.006	
7.0	.149	.089	.047	.128	.077	.041	.089	.054	.029	.051	.032	.017	.017	.010	.006	
8.0	.143	.083	.043	.123	.072	.037	.085	.051	.027	.049	.030	.016	.016	.010	.005	
9.0	.136	.079	.039	.118	.068	.034	.081	.048	.024	.047	.028	.015	.015	.009	.005	
10.0	.131	.074	.037	.113	.064	.032	.078	.045	.023	.046	.027	.014	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm											
NAME: SmartEdge-18W-CPTC						TYPE:3000K 18W			WEIGHT:		
DIM.:						SPEC.:			SERIAL No.:1		
MFR.: EVERFINE						SUR.:0.174*0.174			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.6	23.4	24.8	25.1	23.0	24.5	23.3	24.7	25.0	
	3H	24.5	25.9	24.8	26.1	26.4	24.4	25.8	24.7	26.0	26.3
	4H	25.0	26.3	25.4	26.6	26.9	24.9	26.2	25.2	26.5	26.8
	6H	25.4	26.6	25.7	26.9	27.2	25.2	26.4	25.6	26.7	27.0
	8H	25.5	26.6	25.8	27.0	27.3	25.3	26.5	25.6	26.8	27.1
	12H	25.5	26.6	25.9	27.0	27.3	25.3	26.4	25.7	26.8	27.1
4H	2H	23.7	25.0	24.0	25.2	25.5	23.6	24.9	23.9	25.2	25.5
	3H	25.2	26.4	25.6	26.7	27.0	25.1	26.3	25.5	26.6	26.9
	4H	25.9	26.9	26.3	27.3	27.6	25.8	26.8	26.2	27.1	27.5
	6H	26.3	27.2	26.7	27.6	28.0	26.2	27.1	26.6	27.5	27.9
	8H	26.5	27.3	26.9	27.7	28.1	26.3	27.1	26.7	27.5	28.0
	12H	26.5	27.3	27.0	27.7	28.2	26.3	27.1	26.8	27.5	28.0
8H	4H	26.1	26.9	26.5	27.3	27.8	26.0	26.8	26.4	27.2	27.7
	6H	26.7	27.4	27.1	27.8	28.3	26.5	27.2	27.0	27.7	28.1
	8H	26.9	27.5	27.4	28.0	28.4	26.7	27.3	27.2	27.8	28.3
	12H	27.0	27.6	27.5	28.0	28.6	26.8	27.3	27.3	27.8	28.3
12H	4H	26.1	26.9	26.5	27.3	27.7	26.0	26.8	26.4	27.2	27.6
	6H	26.7	27.3	27.2	27.8	28.3	26.6	27.2	27.1	27.7	28.1
	8H	26.9	27.5	27.4	28.0	28.5	26.8	27.3	27.3	27.8	28.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 1567 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm		
NAME: SmartEdge-18W-CPTC	TYPE:3000K 18W	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:0.174*0.174	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	56	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	98	91	85	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	97	94	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-08-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity:65.0%
 Test Distance:6.400m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm		
NAME: SmartEdge-18W-CPTC	TYPE:3000K 18W	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:0.174*0.174	PROTECTION ANGLE:

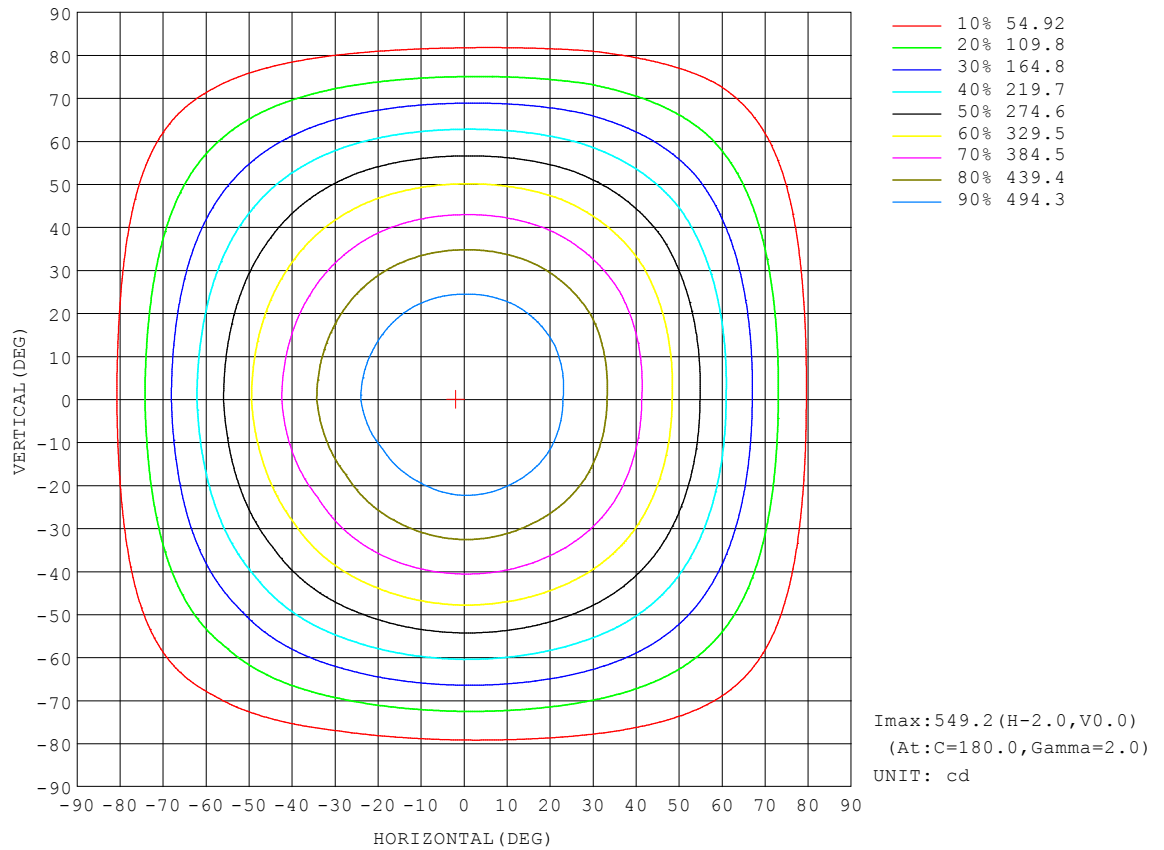


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm		
NAME: SmartEdge-18W-CPTC	TYPE:3000K 18W	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:0.174*0.174	PROTECTION ANGLE:

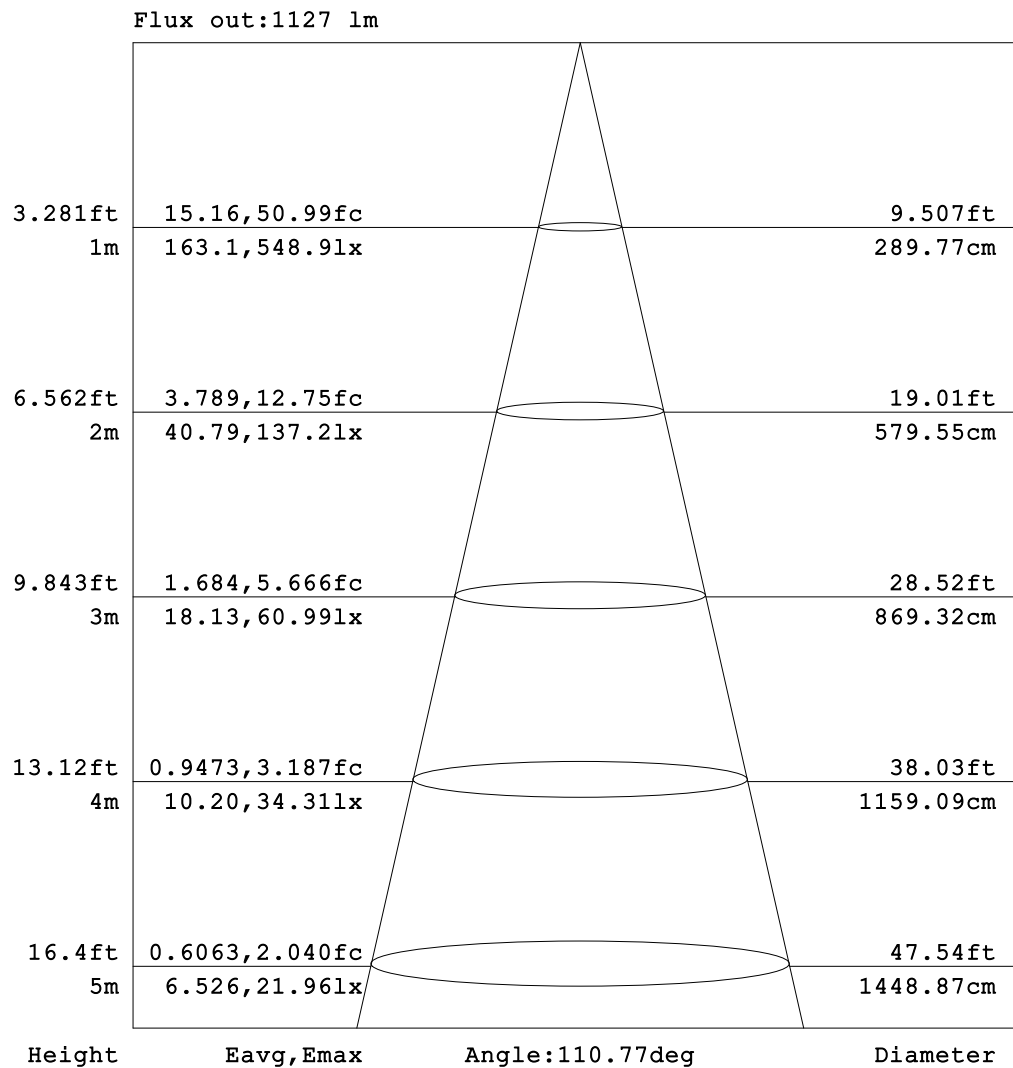


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm		
NAME: SmartEdge-18W-CPTC	TYPE:3000K 18W	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:0.174*0.174	PROTECTION ANGLE:

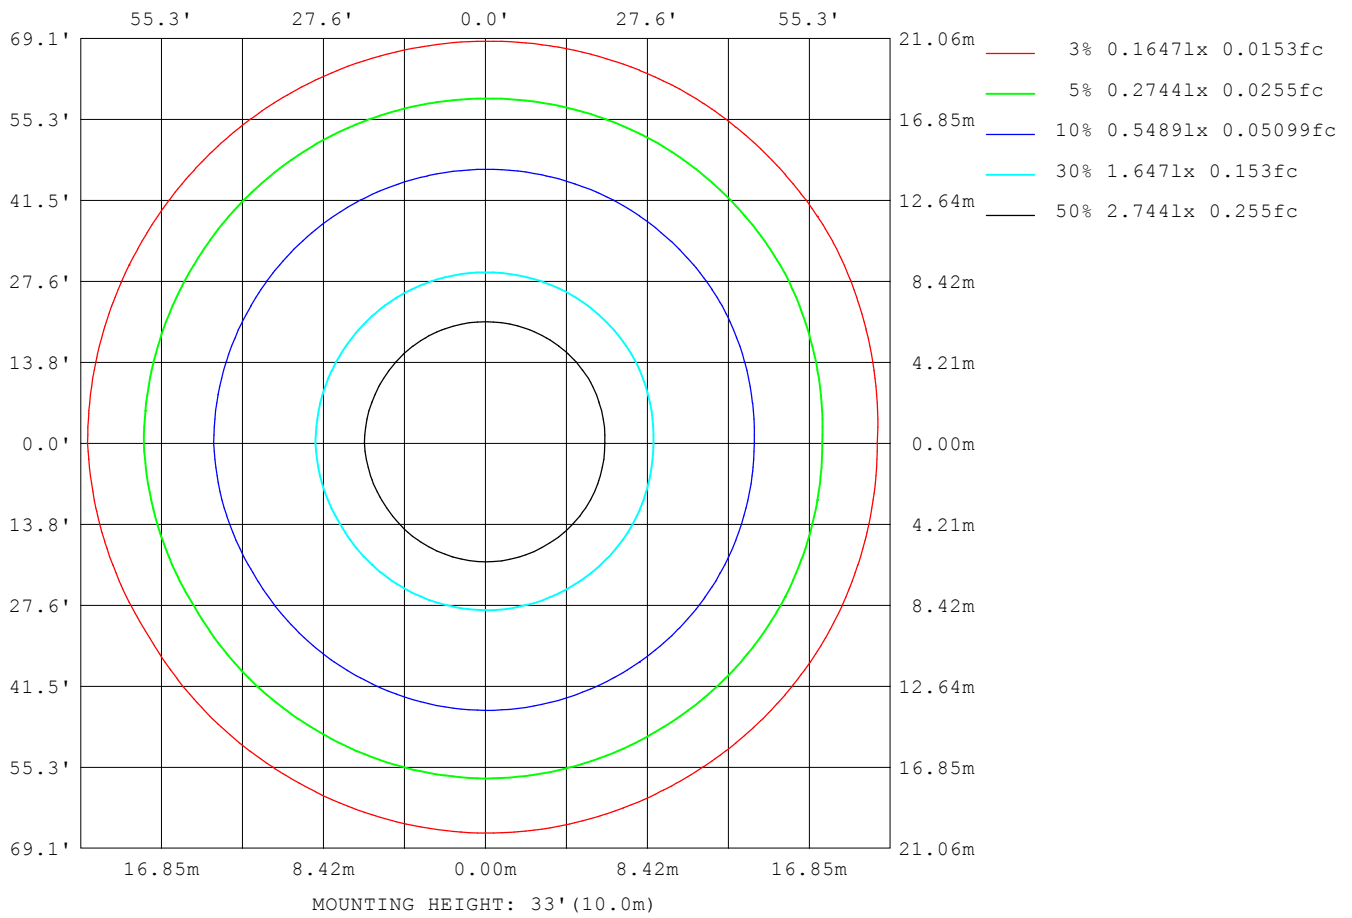

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

Planar Illuminance Curve

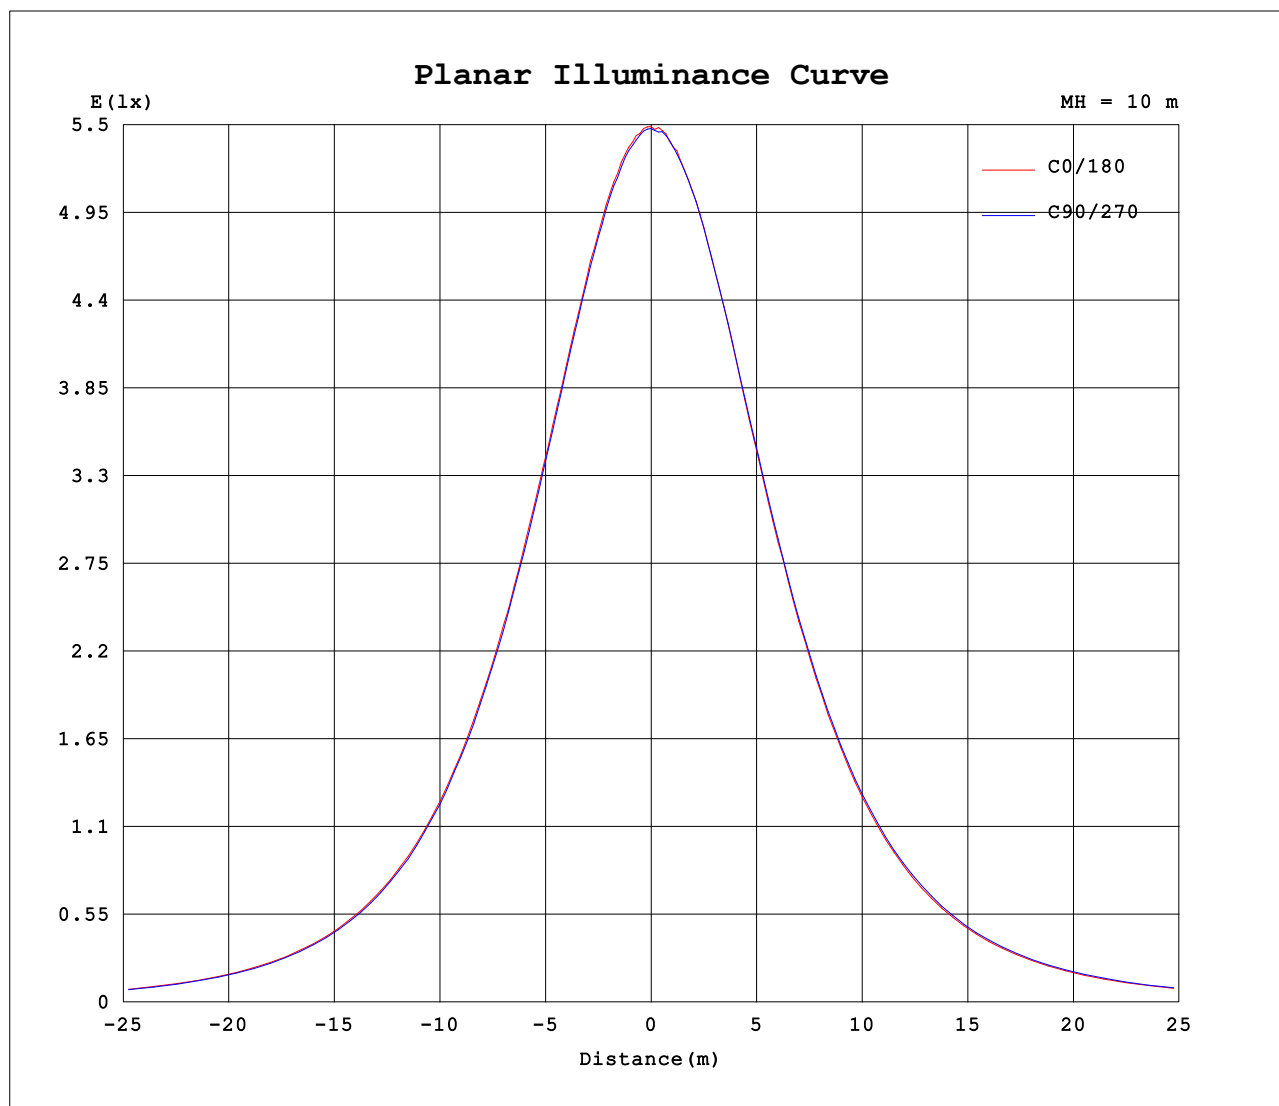

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity: 65.0%
Test Distance: 6.400m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.1V I:0.0818A P:17.77W PF:0.9407 Lamp Flux:1566.55x1 lm																	
NAME: SmartEdge-18W-CPTC									TYPE:3000K 18W						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:1		
MFR.: EVERFINE									SUR.:0.174*0.174						PROTECTION ANGLE:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	549	546	547	548	547	547	549	546	547	548	547	547						
5	546	545	543	543	544	543	546	546	545	547	547	546						
10	538	538	535	536	535	535	540	539	540	539	540	539						
15	525	525	523	522	520	521	529	529	528	528	529	529						
20	507	507	504	504	502	503	512	511	513	513	514	513						
25	486	485	483	481	479	480	489	490	492	492	493	492						
30	460	458	456	455	453	453	464	464	467	467	469	467						
35	429	428	425	424	421	422	434	435	437	438	440	439						
40	394	394	391	389	387	385	400	401	405	405	408	406						
45	356	356	353	351	348	349	364	364	369	369	372	370						
50	317	316	312	311	308	309	325	324	328	330	333	330						
55	273	272	269	269	264	266	282	282	287	289	291	288						
60	228	228	224	224	220	221	238	238	242	245	248	245						
65	182	182	179	179	175	176	193	194	198	200	203	199						
70	137	135	135	132	129	130	146	147	152	154	158	153						
75	92.8	91.3	91.3	88.7	85.4	87.0	103	103	107	110	114	108						
80	51.9	52.4	51.0	48.6	45.8	47.6	60.9	61.0	65.0	68.0	72.2	65.5						
85	20.9	21.9	19.0	16.9	15.8	16.7	23.6	24.6	29.5	30.4	34.4	31.3						
90	4.30	4.57	4.46	4.64	4.57	4.38	3.65	3.72	4.80	4.59	7.03	6.33						
95	3.86	4.15	4.19	4.29	4.44	4.23	2.84	3.17	2.92	2.69	2.86	3.18						
100	3.97	4.24	4.25	4.31	4.40	4.29	2.94	2.91	2.83	2.81	2.77	2.99						
105	4.16	4.38	4.36	4.45	4.40	4.43	3.11	2.96	2.94	2.99	2.92	3.05						
110	4.36	4.54	4.52	4.63	4.54	4.63	3.26	3.14	3.13	3.18	3.12	3.22						
115	4.53	4.69	4.69	4.78	4.71	4.83	3.46	3.36	3.34	3.36	3.34	3.41						
120	4.68	4.82	4.84	4.91	4.87	5.00	3.65	3.60	3.57	3.58	3.56	3.62						
125	4.82	4.97	4.98	4.99	5.04	5.13	3.88	3.84	3.82	3.82	3.81	3.86						
130	5.00	5.12	5.12	5.11	5.20	5.22	4.12	4.11	4.09	4.08	4.07	4.11						
135	5.17	5.25	5.27	5.27	5.33	5.34	4.39	4.38	4.35	4.36	4.33	4.36						
140	5.32	5.40	5.40	5.45	5.45	5.44	4.66	4.63	4.62	4.61	4.58	4.62						
145	5.47	5.54	5.55	5.58	5.58	5.58	4.93	4.89	4.88	4.88	4.84	4.88						
150	5.65	5.70	5.69	5.71	5.74	5.73	5.20	5.15	5.16	5.17	5.12	5.15						
155	5.80	5.85	5.85	5.87	5.89	5.87	5.48	5.42	5.44	5.47	5.39	5.43						
160	6.03	6.06	6.06	6.08	6.08	6.05	5.78	5.70	5.71	5.76	5.67	5.71						
165	6.18	6.20	6.19	6.22	6.21	6.20	6.01	5.94	5.96	6.00	5.92	5.96						
170	6.31	6.32	6.31	6.33	6.31	6.32	6.17	6.14	6.16	6.21	6.13	6.15						
175	6.43	6.43	6.40	6.44	6.40	6.40	6.34	6.31	6.31	6.37	6.30	6.31						
180	6.45	6.43	6.43	6.50	6.41	6.43	6.46	6.43	6.43	6.50	6.41	6.44						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks: