
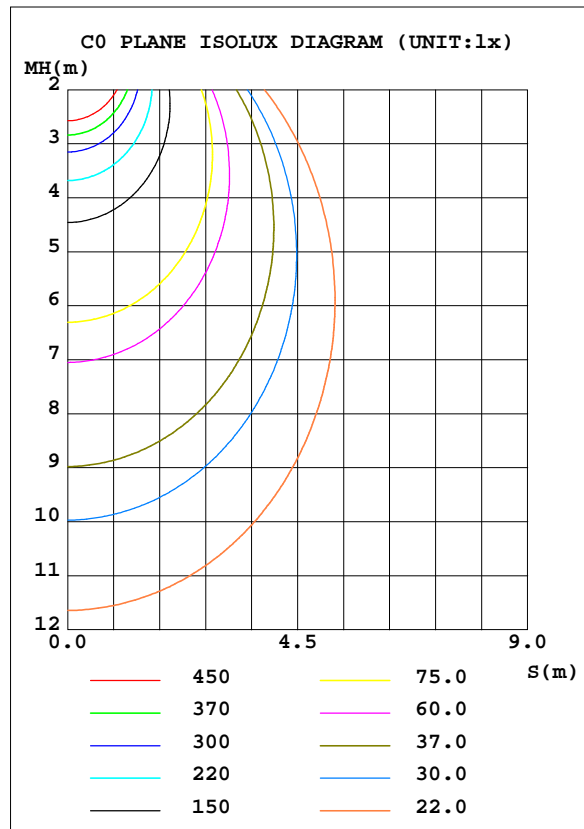


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.73 lm/W			
MODEL		I _{max} (cd)	2983	S/MH(C0/180)	1.16
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	7749.8	η UP, DN(C0-180)	1.3, 48.4
NOMINAL FLUX(lm)	7749.83	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 48.8
LAMPS INSIDE	1	η up(%)	2.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220.6	η down(%)	97.3	CIBSE SHR MAX	1.35

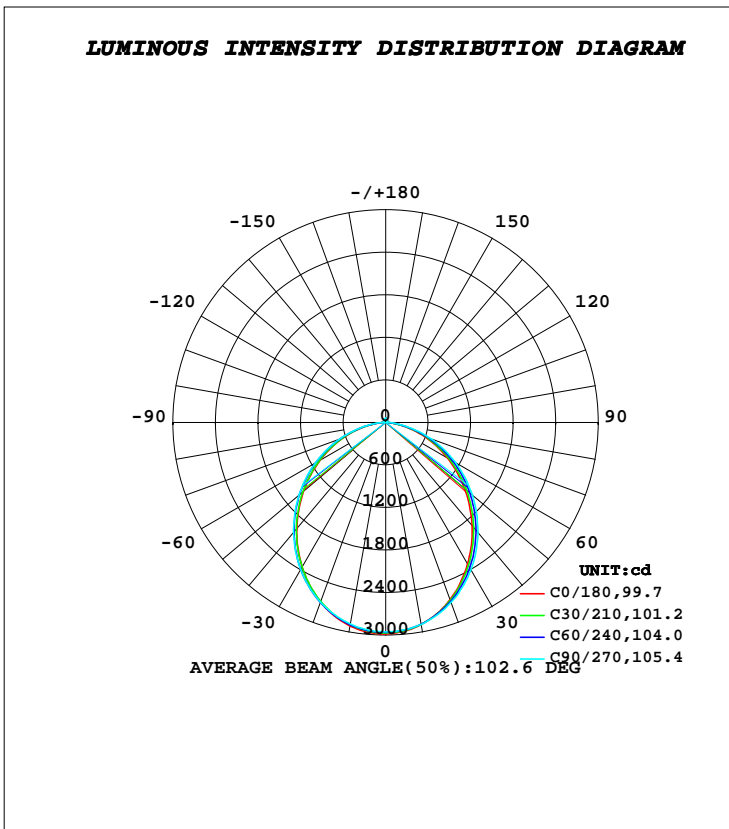

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2894	2889	2891	2880	2914	2897	2886	2865	0- 10	279.1	279.1	3.6,3.6
20	2658	2675	2699	2679	2693	2692	2695	2654	10- 20	788.8	1068	13.8,13.8
30	2309	2352	2403	2363	2355	2378	2399	2330	20- 30	1165	2233	28.8,28.8
40	1897	1956	2024	1974	1950	1987	2022	1938	30- 40	1357	3590	46.3,46.3
50	1454	1521	1598	1544	1516	1560	1597	1507	40- 50	1352	4942	63.8,63.8
60	1011	1070	1141	1098	1071	1113	1148	1060	50- 60	1173	6115	78.9,78.9
70	581.2	625.6	683.8	655.9	639.9	671.1	695.7	619.9	60- 70	856.7	6972	90,90
80	191.4	216.7	251.4	243.0	243.1	258.8	265.7	220.2	70- 80	458.1	7430	95.9,95.9
90	14.28	15.43	15.46	18.82	19.83	24.48	26.04	22.34	80- 90	107.2	7537	97.3,97.3
100	19.11	19.32	19.97	19.90	23.28	24.69	25.15	24.71	90-100	21.98	7559	97.5,97.5
110	24.64	24.48	25.05	24.74	28.28	29.48	29.32	29.13	100-110	25.80	7585	97.9,97.9
120	30.59	29.75	30.39	30.59	33.77	34.77	33.99	33.95	110-120	29.30	7614	98.2,98.2
130	36.60	35.15	36.14	36.44	39.09	40.04	39.08	38.77	120-130	31.29	7645	98.7,98.7
140	42.11	40.91	42.33	42.08	43.93	45.10	44.62	43.75	130-140	31.18	7677	99.1,99.1
150	47.47	46.66	48.21	47.51	48.53	49.89	50.00	48.64	140-150	28.64	7705	99.4,99.4
160	52.97	52.33	53.78	52.65	53.08	54.05	54.62	53.24	150-160	23.45	7729	99.7,99.7
170	57.98	56.88	58.07	56.75	56.91	57.45	58.25	56.91	160-170	15.63	7744	99.9,99.9
180	59.94	59.07	59.98	58.57	60.13	59.02	59.90	58.55	170-180	5.548	7750	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

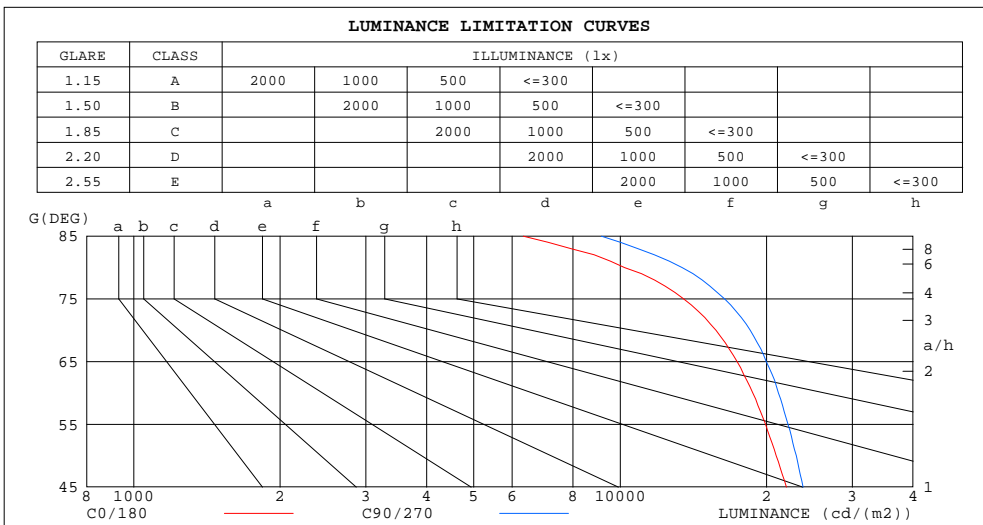

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	6327	9149
80	10206	13408
75	13500	16410
70	15734	18513
65	17399	19970
60	18724	21137
55	19895	22144
50	20939	23016
45	21956	23779


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

ρcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρw																
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.92	.90	.88	.88	.86	.85	.82
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.64	.58	.54	.62	.57	.53	.50
5.0	.64	.55	.49	.63	.54	.48	.60	.53	.47	.58	.52	.47	.56	.50	.46	.44
6.0	.58	.49	.43	.57	.48	.42	.54	.47	.42	.53	.46	.41	.51	.45	.41	.38
7.0	.52	.44	.38	.51	.43	.37	.50	.42	.37	.48	.41	.37	.46	.41	.36	.34
8.0	.48	.39	.34	.47	.39	.34	.45	.38	.33	.44	.38	.33	.43	.37	.32	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.34	.30	.39	.34	.29	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

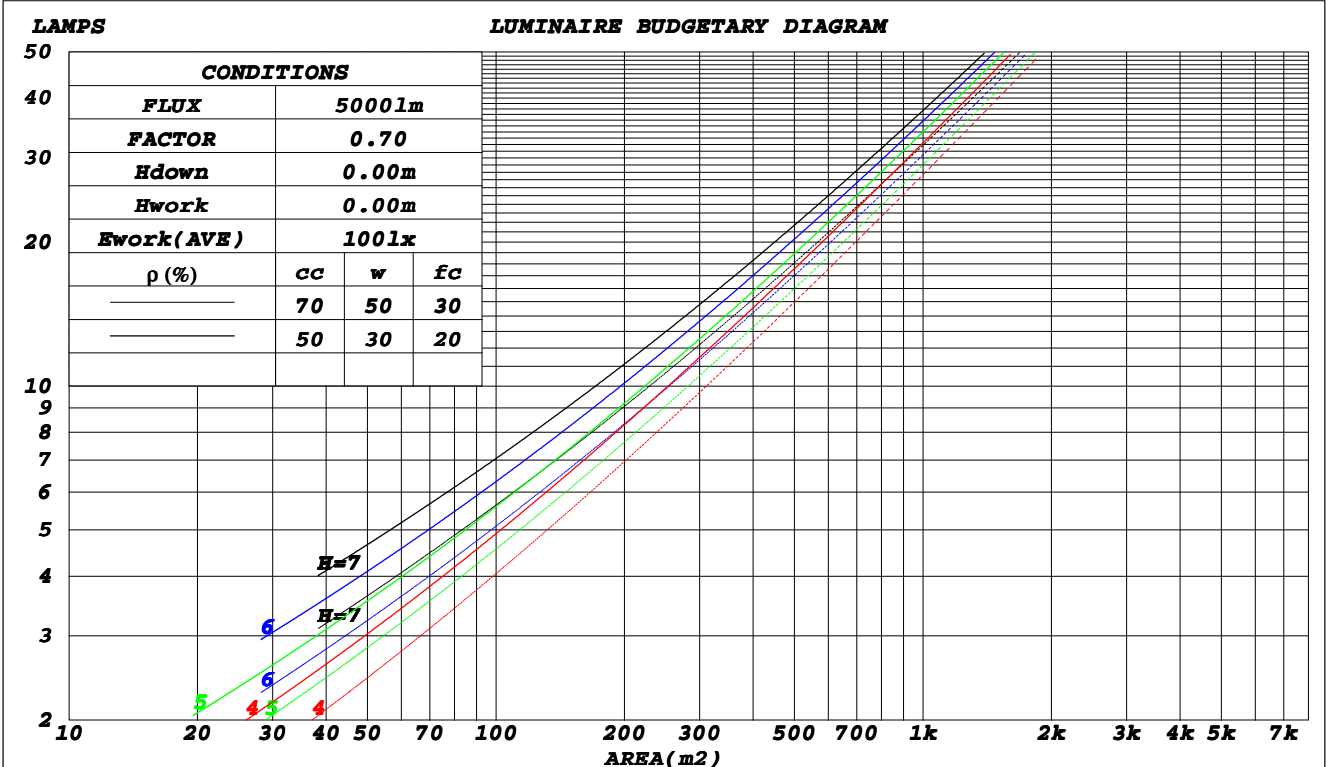

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.295	.168	.053	.287	.164	.052	.272	.156	.050	.259	.149	.048	.246	.143	.046	
2.0	.280	.153	.047	.273	.150	.046	.260	.144	.045	.248	.139	.043	.236	.134	.042	
3.0	.260	.138	.041	.254	.136	.041	.242	.131	.040	.232	.127	.039	.222	.123	.038	
4.0	.241	.125	.037	.235	.123	.036	.225	.119	.036	.216	.116	.035	.207	.112	.034	
5.0	.223	.114	.033	.219	.112	.033	.209	.109	.032	.201	.106	.032	.193	.103	.031	
6.0	.208	.104	.030	.203	.103	.030	.195	.100	.029	.187	.097	.029	.180	.095	.028	
7.0	.194	.096	.027	.190	.095	.027	.182	.092	.027	.176	.090	.026	.169	.088	.026	
8.0	.181	.089	.025	.178	.088	.025	.171	.086	.024	.165	.084	.024	.159	.082	.024	
9.0	.170	.082	.023	.167	.081	.023	.161	.080	.023	.155	.078	.022	.150	.076	.022	
10.0	.160	.077	.021	.157	.076	.021	.152	.074	.021	.147	.073	.021	.142	.071	.020	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.211	.211	.211	.181	.181	.181	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.200	.177	.157	.171	.152	.135	.117	.105	.093	.067	.061	.054	.022	.020	.018	
2.0	.192	.153	.121	.164	.132	.104	.113	.091	.073	.065	.053	.043	.021	.017	.014	
3.0	.184	.136	.097	.158	.117	.084	.108	.081	.059	.063	.047	.035	.020	.015	.011	
4.0	.176	.122	.081	.151	.106	.070	.104	.074	.050	.060	.043	.029	.019	.014	.010	
5.0	.169	.112	.070	.145	.097	.061	.100	.068	.043	.058	.040	.025	.019	.013	.008	
6.0	.162	.103	.062	.139	.090	.054	.096	.063	.038	.056	.037	.023	.018	.012	.007	
7.0	.155	.097	.056	.133	.084	.048	.092	.059	.034	.054	.035	.020	.017	.011	.007	
8.0	.149	.091	.051	.128	.079	.044	.089	.055	.032	.052	.033	.019	.017	.011	.006	
9.0	.143	.086	.047	.123	.075	.041	.085	.052	.029	.050	.031	.017	.016	.010	.006	
10.0	.137	.082	.045	.118	.071	.039	.082	.050	.028	.048	.029	.016	.016	.010	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz										
Lamp Flux:7749.83x1 lm										
NAME: BWD-TL60					TYPE: LED					
MFR.:					DIM.: 1500*120*40mm					
					SUR.: 1450*95mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.6	22.5	24.0	24.3	22.7	24.2	23.1	24.6	25.0
3H	23.6	25.0	24.0	25.4	25.8	24.4	25.8	24.8	26.1	26.6
4H	24.1	25.4	24.6	25.8	26.3	25.0	26.3	25.4	26.7	27.1
6H	24.4	25.7	24.9	26.1	26.5	25.4	26.6	25.8	27.0	27.4
8H	24.5	25.7	25.0	26.1	26.6	25.4	26.6	25.9	27.0	27.5
12H	24.5	25.6	25.0	26.1	26.6	25.5	26.6	26.0	27.0	27.5
4H 2H	22.7	24.0	23.1	24.4	24.8	23.2	24.5	23.7	24.9	25.4
3H	24.5	25.5	24.9	26.0	26.5	25.1	26.2	25.6	26.7	27.1
4H	25.1	26.1	25.6	26.5	27.0	25.8	26.8	26.3	27.3	27.8
6H	25.5	26.3	26.0	26.8	27.4	26.3	27.2	26.8	27.7	28.2
8H	25.6	26.4	26.1	26.9	27.4	26.5	27.3	27.0	27.8	28.3
12H	25.6	26.3	26.1	26.9	27.4	26.5	27.3	27.1	27.8	28.3
8H 4H	25.3	26.2	25.9	26.6	27.2	26.1	26.9	26.6	27.4	27.9
6H	25.8	26.5	26.4	27.0	27.6	26.7	27.3	27.2	27.9	28.4
8H	26.0	26.6	26.5	27.1	27.7	26.9	27.4	27.4	28.0	28.6
12H	26.0	26.6	26.6	27.1	27.7	27.0	27.5	27.5	28.0	28.7
12H 4H	25.4	26.1	25.9	26.6	27.1	26.1	26.8	26.6	27.3	27.9
6H	25.9	26.5	26.4	27.0	27.6	26.7	27.3	27.3	27.8	28.4
8H	26.0	26.6	26.6	27.1	27.7	26.9	27.4	27.5	28.0	28.6
CIE190: 2010										

CIE190: 2010
Area: 0.108 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-07-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	58	47	40	56	46	40	34
0.80	68	57	50	67	57	50	65	56	49	42
1.00	77	66	59	75	65	58	73	66	58	51
1.25	84	73	67	82	73	66	79	71	65	58
1.50	89	79	72	87	78	72	83	76	70	63
2.00	95	87	81	93	86	80	89	83	78	70
2.50	99	91	86	97	90	85	93	87	82	74
3.00	102	96	90	100	94	89	95	91	87	78
4.00	106	101	96	104	99	95	99	95	92	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

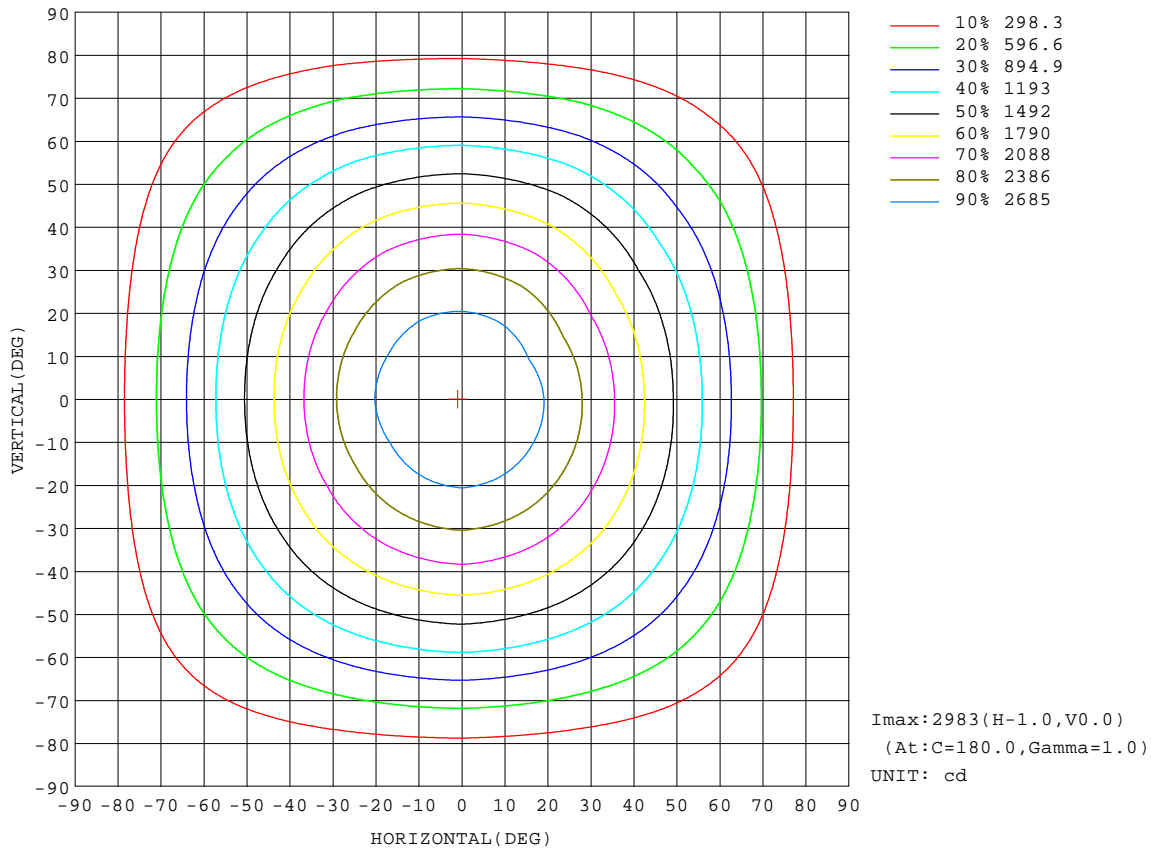


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

Flux out:5070 lm

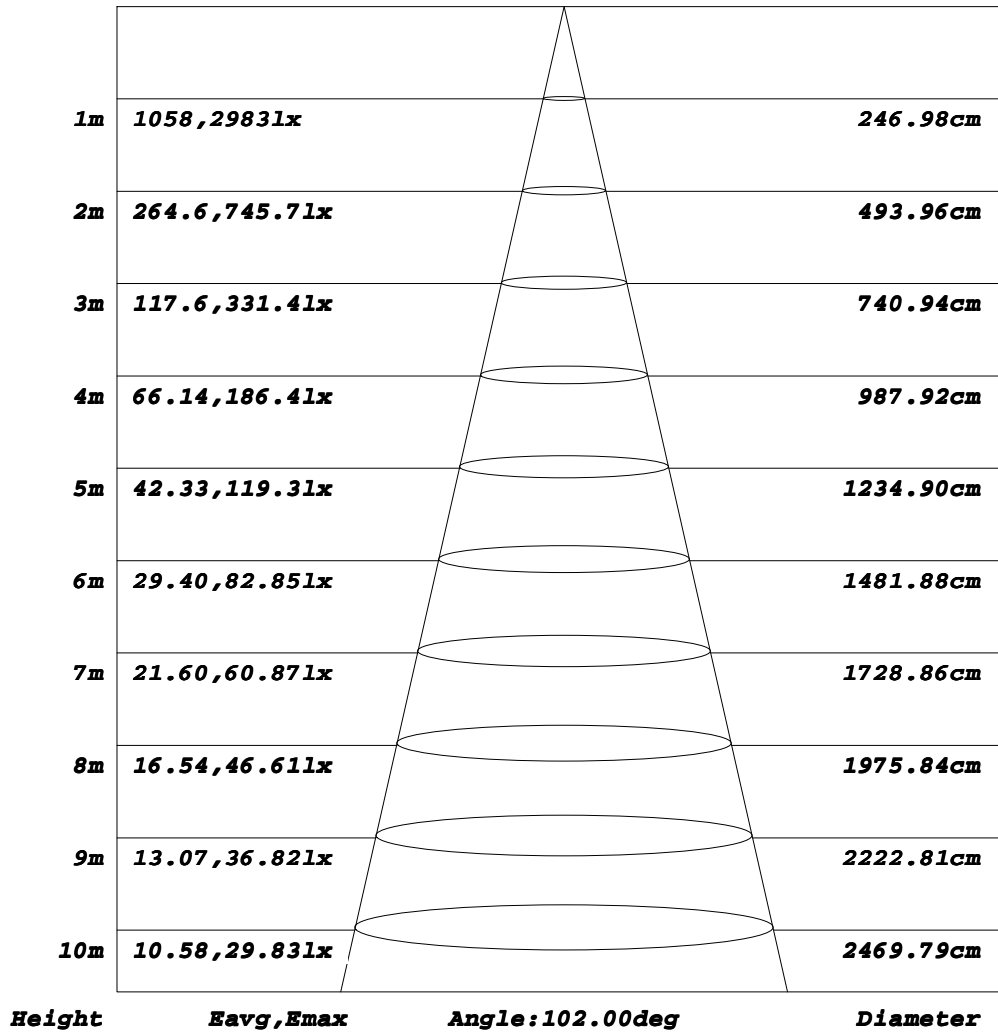


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

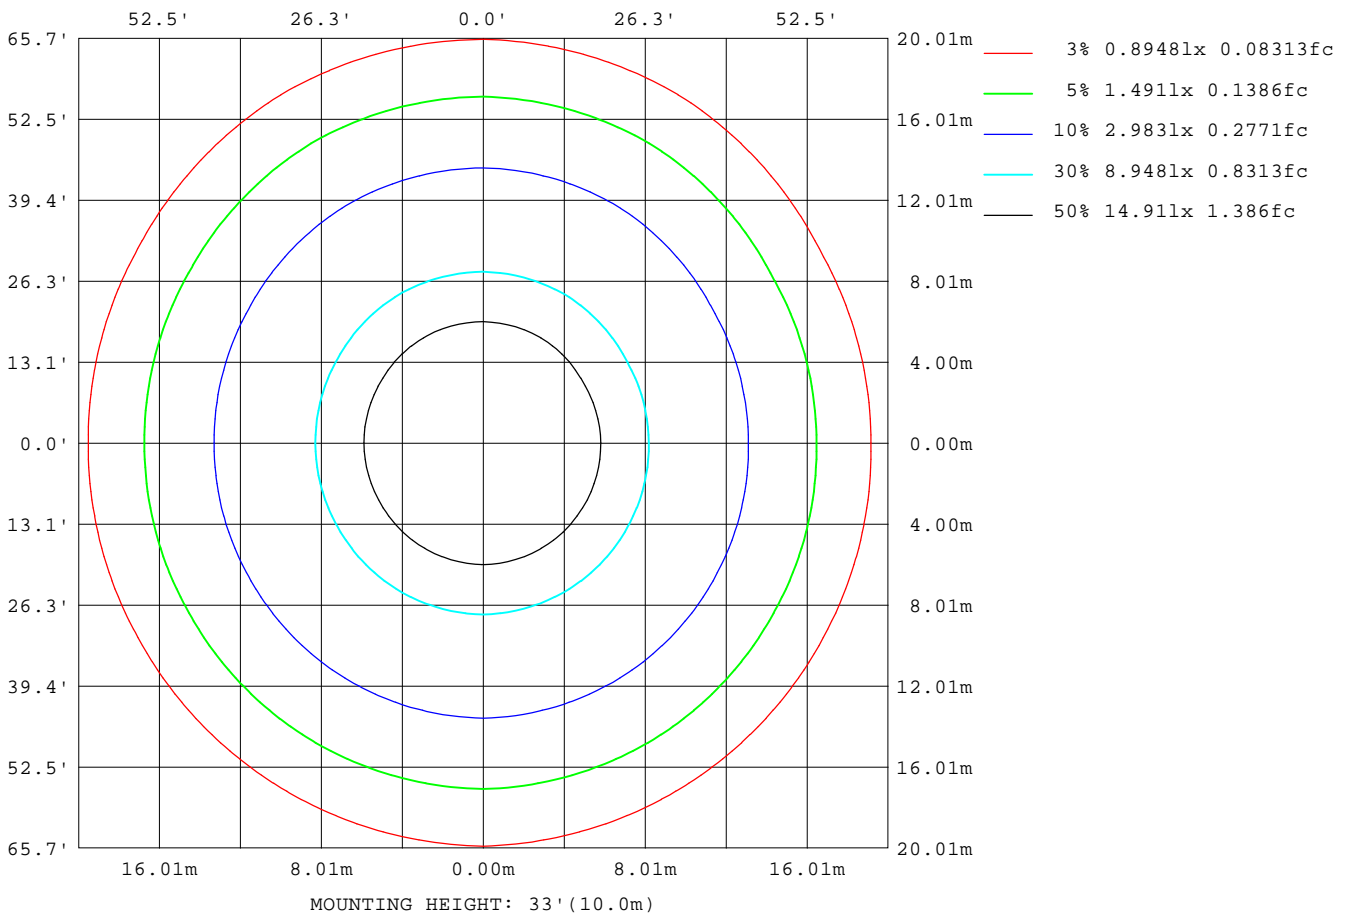

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

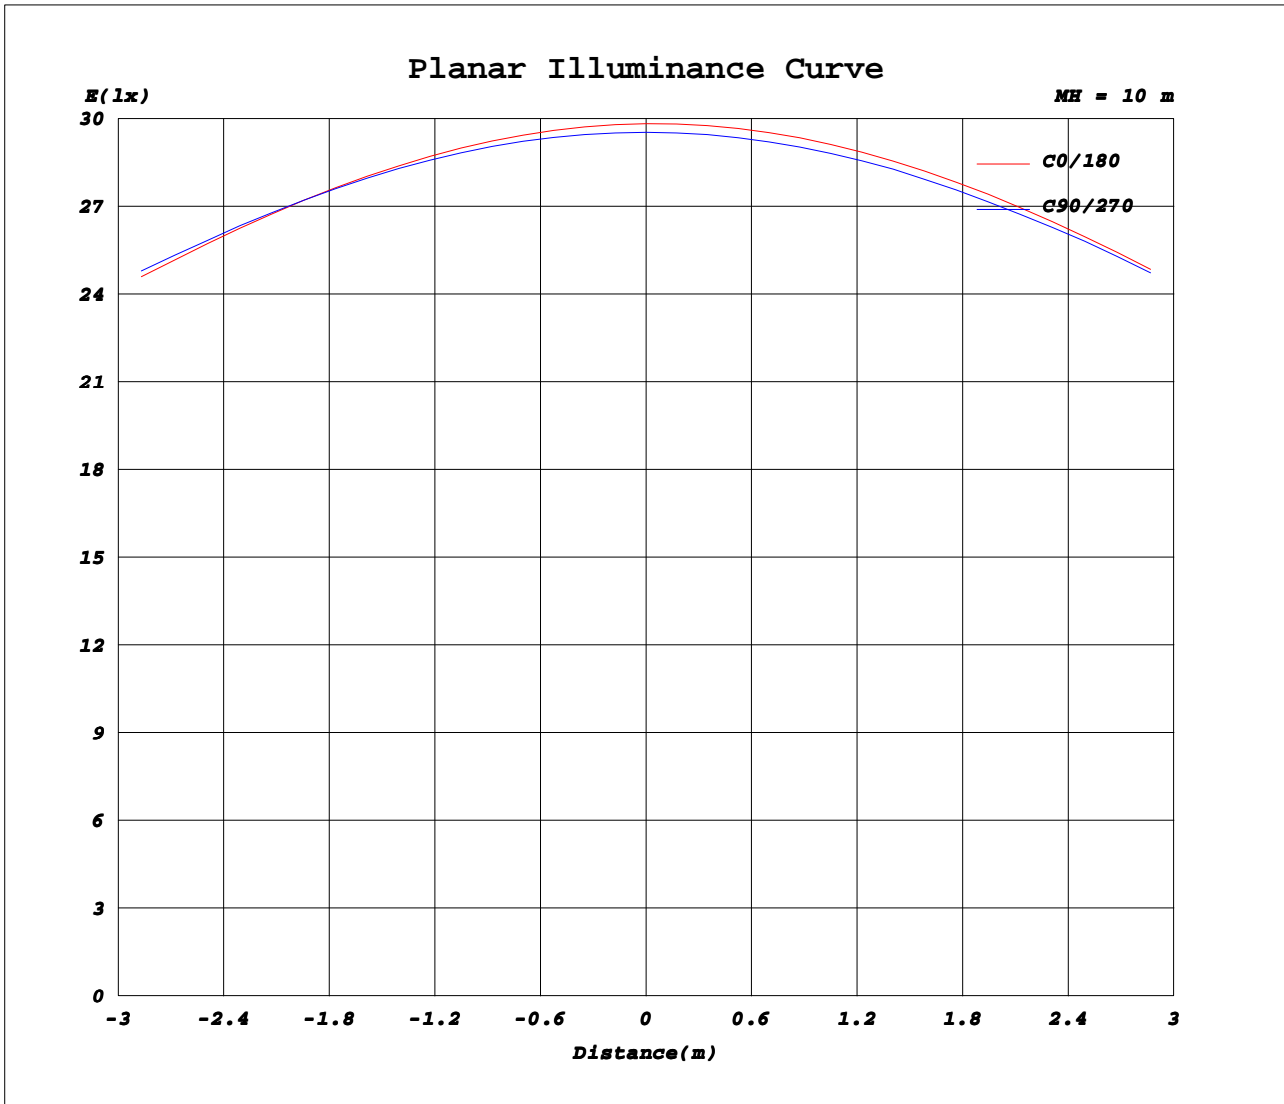

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.2840A P:60.200W PF:0.9600 Freq:50.00Hz		
Lamp Flux:7749.83x1 lm		
NAME: BWD-TL60	TYPE: LED	
MFR.:	DIM.: 1500*120*40mm	
	SUR.: 1450*95mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2983	2970	2960	2954	2950	2943	2983	2970	2960	2954	2950	2943							
5	2957	2949	2940	2939	2933	2929	2968	2952	2945	2937	2931	2918							
10	2894	2891	2887	2891	2882	2878	2914	2896	2897	2886	2877	2853							
15	2793	2796	2800	2810	2800	2792	2822	2806	2814	2806	2792	2759							
20	2658	2667	2684	2699	2687	2670	2693	2683	2700	2695	2677	2630							
25	2494	2511	2540	2563	2545	2520	2535	2534	2560	2560	2534	2475							
30	2309	2333	2372	2403	2379	2348	2355	2360	2395	2399	2365	2295							
35	2108	2138	2183	2223	2195	2158	2160	2166	2212	2218	2181	2098							
40	1897	1930	1982	2024	1994	1954	1950	1962	2012	2022	1982	1894							
45	1677	1715	1770	1816	1782	1742	1733	1747	1804	1813	1771	1676							
50	1454	1493	1549	1598	1564	1524	1516	1528	1591	1597	1558	1457							
55	1232	1268	1326	1372	1342	1302	1290	1307	1364	1374	1332	1235							
60	1011	1042	1098	1141	1116	1080	1071	1085	1141	1148	1107	1014							
65	794	821	871	911	890	861	854	868	916	923	881	798							
70	581	606	645	684	665	647	640	651	691	696	656	584							
75	377	397	425	459	445	437	433	441	472	473	438	381							
80	191	209	225	251	241	245	243	248	270	266	238	202							
85	59.6	66.2	72.3	86.1	83.4	88.8	90.1	91.7	105	98.7	87.8	68.7							
90	14.3	15.2	15.6	15.5	17.8	19.8	19.8	23.8	25.2	26.0	23.1	21.5							
95	16.5	16.5	17.1	17.6	17.2	20.1	21.1	22.0	23.0	23.3	22.5	22.6							
100	19.1	19.1	19.6	20.0	19.7	20.1	23.3	24.3	25.1	25.1	24.5	24.9							
105	21.8	21.7	22.1	22.5	22.4	21.4	25.7	26.7	27.3	27.2	26.6	27.2							
110	24.6	24.4	24.5	25.1	25.2	24.2	28.3	29.4	29.6	29.3	28.8	29.5							
115	27.6	27.1	27.0	27.7	28.1	27.2	31.0	32.1	32.0	31.6	31.0	32.0							
120	30.6	29.9	29.6	30.4	30.9	30.3	33.8	35.0	34.6	34.0	33.4	34.5							
125	33.6	32.6	32.1	33.2	33.7	33.3	36.5	37.7	37.1	36.4	35.7	37.0							
130	36.6	35.4	34.9	36.1	36.7	36.2	39.1	40.4	39.7	39.1	38.1	39.5							
135	39.4	38.2	37.7	39.2	39.5	39.1	41.6	42.9	42.2	41.8	40.6	41.9							
140	42.1	41.1	40.7	42.3	42.4	41.8	43.9	45.4	44.8	44.6	43.3	44.2							
145	44.8	44.0	43.6	45.3	45.2	44.5	46.2	47.7	47.4	47.4	45.9	46.5							
150	47.5	46.8	46.5	48.2	47.9	47.1	48.5	49.9	49.9	50.0	48.5	48.8							
155	50.1	49.7	49.4	51.1	50.7	49.6	50.8	51.9	52.2	52.4	51.1	51.0							
160	53.0	52.4	52.3	53.8	53.3	52.0	53.1	53.8	54.3	54.6	53.4	53.1							
165	55.6	54.9	54.8	56.2	55.7	54.0	55.1	55.5	56.2	56.6	55.6	54.9							
170	58.0	56.8	56.9	58.1	57.6	55.9	56.9	57.1	57.8	58.2	57.4	56.4							
175	59.4	58.2	58.4	59.4	58.8	57.3	58.8	58.1	58.8	59.4	58.7	57.2							
180	59.9	59.0	59.1	60.0	59.3	57.8	60.1	58.7	59.3	59.9	59.4	57.7							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-07-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: