

Name / model

Index

**GEVO MAX SMD E27-WW**

**22470**


Type

EAN code


**LED lamp**



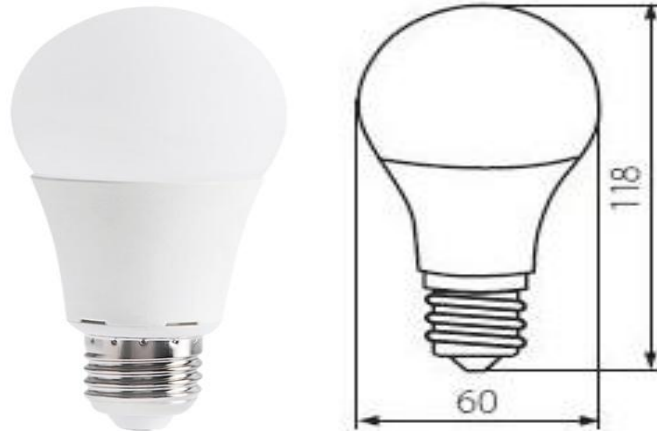



**5905339224705**



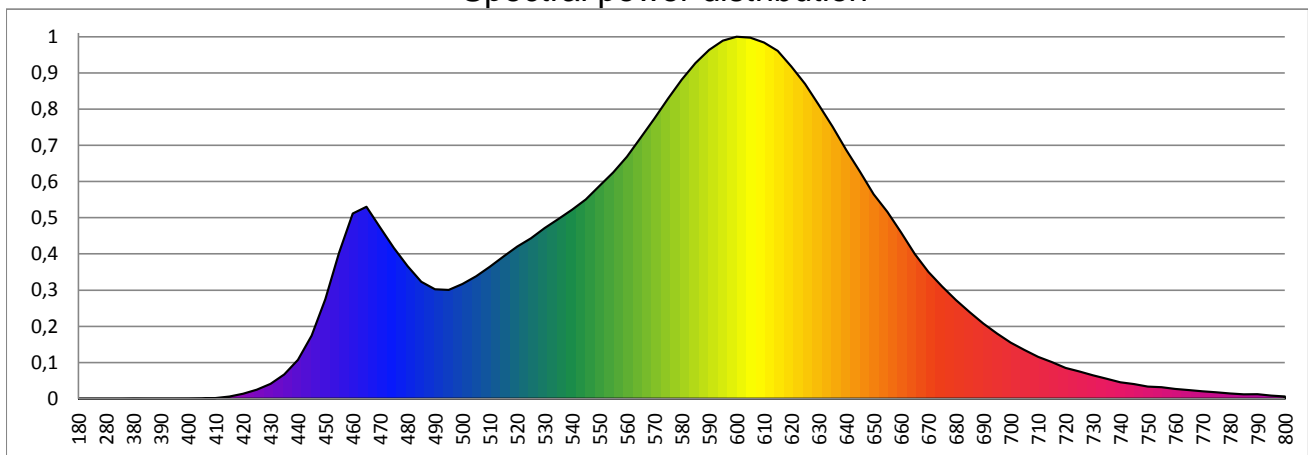


















Product photo / dimensions [mm]




Spectral power distribution



	Parameter	Unit	Value
	Rated voltage	[V]	220-240
	Rated frequency	[Hz]	50/60
	Rated power	[W]	10,5
	Rated current of the lamp	[A]	0,085
	Lamp cap	-	E27
	Rated useful luminous flux	[lm]	1050

	An equivalence claim involving the power of a replaced lam	[W]	10,5-75
	Colour temperature	[K]	3000
2000K	4000K	5500K	8000K
	Colour consistency	-	≤6
	Number of switching cycles before premature failure	-	≥15000
	Nominal beam angle	[°]	180
	Nominal useful luminous flux	[lm]	1050
	Nominal life time of the lamp / Rated lamp life time	[h]	25000
	Lamp power factor	-	≥0,5
	Lumen maintenance factor at the end of the nominal life	[%]	≥65
	Starting time	[s]	<0,5
	Colour rendering	-	≥80
	Rated peak intensity	[cd]	-
	Rated beam angle	[°]	180
	Lamp mercury content	[mg]	no
	Warm-up time up to 60 % of the full light output	[s]	instant full light
	Lumen Maintenance at 6000h	-	≥80%
	Lamp warm-up time to 95 %	-	<2 s
	Lamp survival factor at 6000h	-	≥90%
	Premature failure rate	-	<5% at 1000h
	Lamp cannot be dimmed	-	-
	Lamp is not suitable for accent lighting	-	-

Energy efficiency label

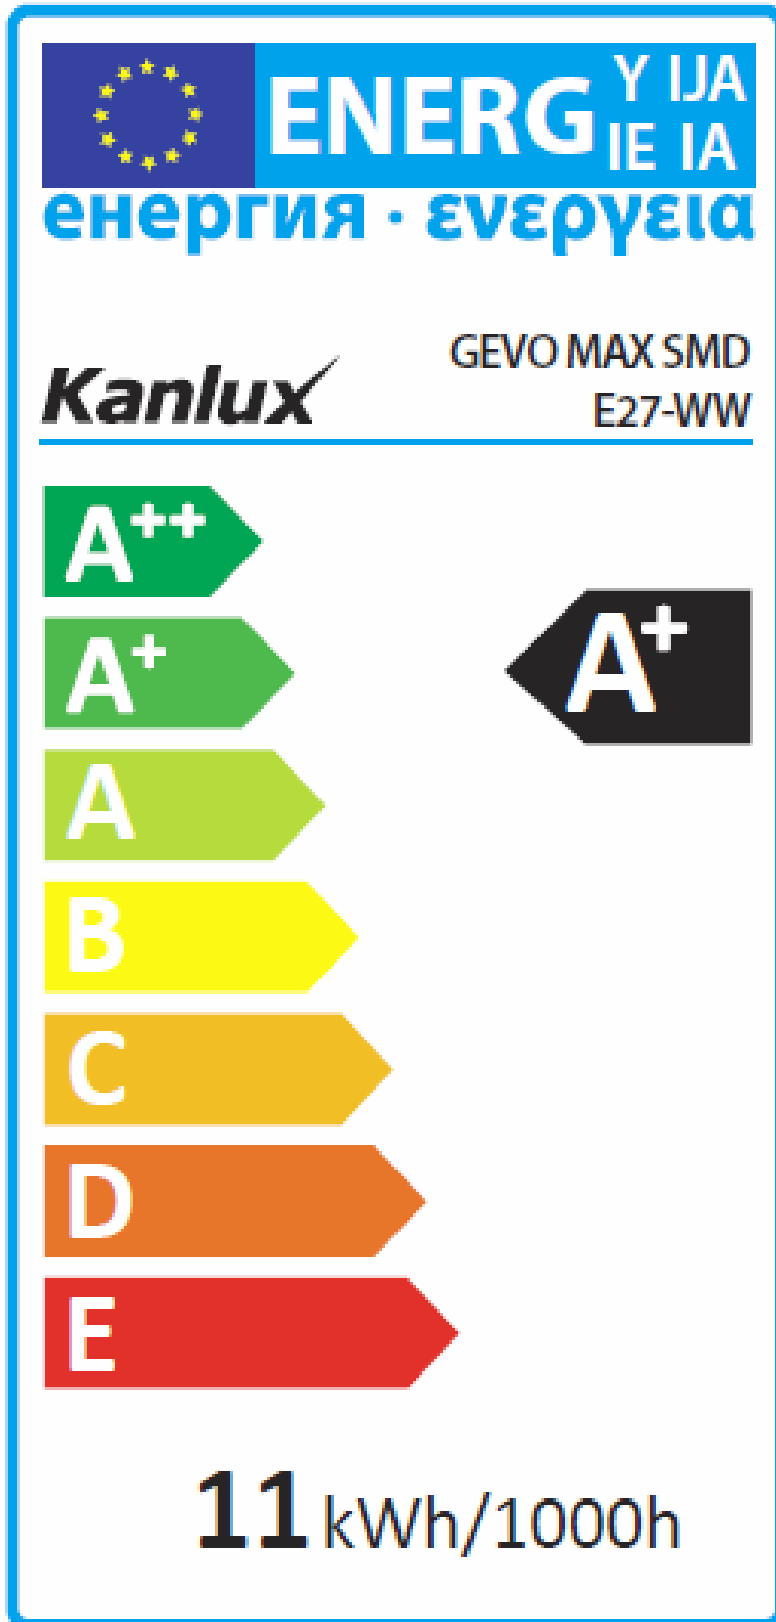

The use of this document contrary to its intended purpose is forbidden. Kanlux S.A. reserves the right, at any time in our sole discretion to change or modify the content without giving reason.

\* Results obtained during test of a specific item