



AMATROLED

Matala LED 10W Graphite



Features

Surface mounting ultra-slim low level circular pathway light with downward light-spill.

Die-cast aluminium construction with graphite paint finish.

Comparable performance to 26W PLC.

Screwless front cover with concealed allen key access.

Pre-wired with 1 metre of rubber insulated cable for ease of installation.

LED lifespan L70 50,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Warranty (Years)	2
CE Mark	Yes
Height / Depth	50
Length / Diameter	195


Technical Information

Wattage	10W
Lumens Delivered	360lm
Lm/W	36 Lm/W
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 50°C

Technical Data - ETIM 6 - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
With light source	Yes
Material housing	Aluminium
Colour housing	Other
Suitable for number of lamps	1
Voltage type	AC
Nominal voltage	230-230 V
Control gear included	Yes
Type of dimming	Not dimmable
Degree of protection (IP)	IP65
Protection class	I
Rated luminous flux acc. IEC 62722-2-1	360 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Length	195 mm
Width	195 mm
Lamp power	10 W
Lamp power at multiwatt	Not applicable
Suitable for emergency lighting	No
Emergency unit integrated	No
Suitable for ceiling mounting	No
Suitable for built-in mounting	No
Suitable for surface mounting	Yes

With light sensor	No
With movement sensor	No
Max. system power	10 W
Type of grid	None
Reflector	None
Light sharing	Asymmetric
Height/depth	50 mm
Ambient temperature	-20-50 °C
Suitable for light line configuration	No

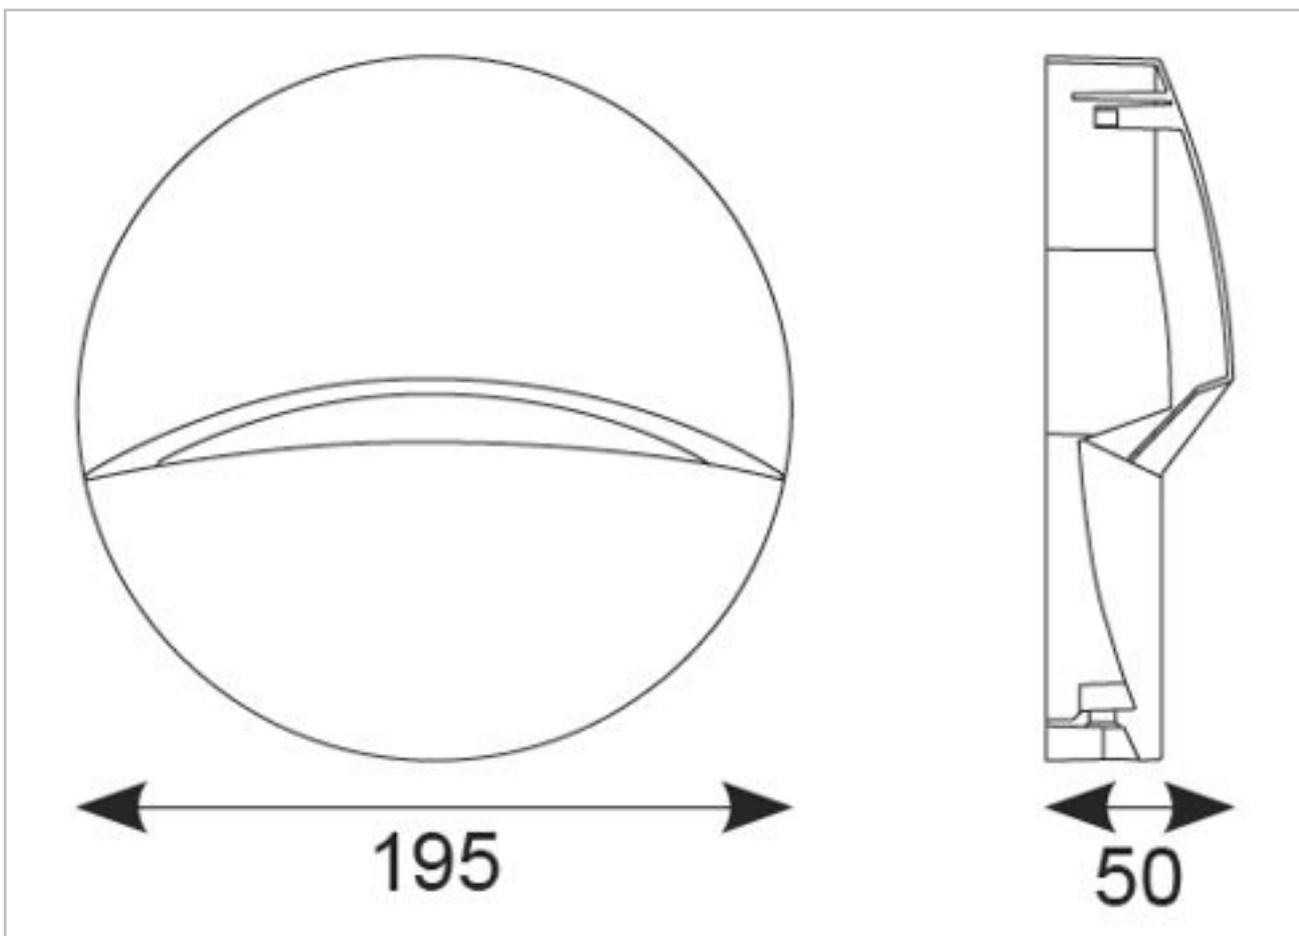

Datasheet generated from <http://www.electrika.com> last updated Thursday, December 7, 2017 12:00:14 PM