




## Product data

<b>Applications</b>	offices Education
<b>Luminaire type</b>	Linear pendant lighting
<b>Light sources</b>	LED
<b>Mounting method</b>	Pendant, Surface
<b>Luminaire optic</b>	Direct UGR<19,80D/Indirect 150D
<b>Connected load</b>	Direct 36W/Indirect 30W
<b>Power factor</b>	0.96
<b>Colour temperature</b>	4.000 K
<b>Rated luminous flux</b>	Direct 5800 lm/Indirect 4500 lm
<b>Luminous efficacy</b>	140 lm/W
<b>Interchangeability lightsource</b>	Direct:1.2M GR6D module,Indirect:0.9M GR6D module
<b>Service life</b>	L90 B50(25 °C) > 50.000 h
<b>Colour rendering index</b>	>80
<b>Colour tolerance</b>	<5 SDCM
<b>Photobiological class</b>	Group 0 - no risk
<b>Luminaire colour</b>	RAL9003 white/RAL9011 black
<b>Luminaire body</b>	Alumiumm
<b>Electrical version</b>	With electronic transformer,digitally dimmable(DALI)
<b>DALI-2-Standard EN 62386</b>	Yes
<b>Connection method</b>	Plug-in terminal
<b>Dimming range</b>	1 - 100 %
<b>Mains frequency</b>	50/60 Hz
<b>Mains voltage</b>	220 - 240 V
<b>Total harmonic distortion &lt; %</b>	15 %
<b>Ingress Protection (IP) rating</b>	IP20
<b>Protection rating on room side</b>	IP20
<b>Protection class</b>	I
<b>Impact resistance (IK)</b>	Ik06
<b>Hot wire resistance glow wire test</b>	650 °C
<b>Operating temperature</b>	-20 - 35 °C
<b>Max. Luminaires B10</b>	7
<b>Max. Luminaires B16</b>	12
<b>Max. Luminaires C10</b>	12
<b>Max. Luminaires C16</b>	20
<b>Net length</b>	1182 mm
<b>Net width</b>	45.5 mm
<b>Net height</b>	80 mm

## light distribution curve

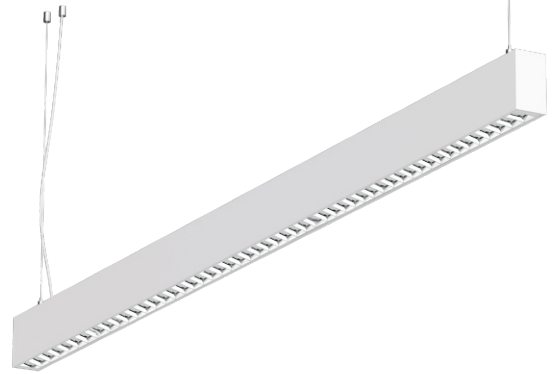

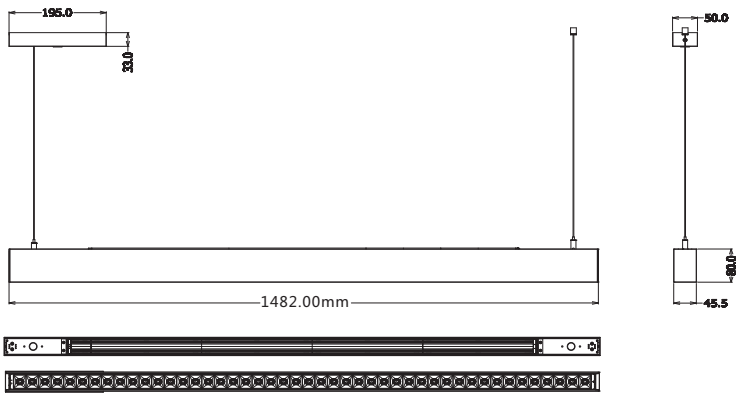

## Product data

<b>Applications</b>	offices Education
<b>Luminaire type</b>	Linear pendant lighting
<b>Light sources</b>	LED
<b>Mounting method</b>	Pendant, Surface
<b>Luminaire optic</b>	Direct UGR<19,80D/Indirect 150D
<b>Connected load</b>	Direct 50W/Indirect 40W
<b>Power factor</b>	0.96
<b>Colour temperature</b>	4.000 K
<b>Rated luminous flux</b>	Direct 7000 lm/Indirect 5600 lm
<b>Luminous efficacy</b>	140 lm/W
<b>Interchangeability lightsource</b>	Direct:1.5M GR6D module,Indirect:0.2M GR6D module
<b>Service life</b>	L90 B50(25 °C) > 50.000 h
<b>Colour rendering index</b>	>80
<b>Colour tolerance</b>	<5 SDCM
<b>Photobiological class</b>	Group 0 - no risk
<b>Luminaire colour</b>	RAL9003 white/RAL9011 black
<b>Luminaire body</b>	Aluminium
<b>Electrical version</b>	With electronic transformer,digitally dimmable(DALI)
<b>DALI-2-Standard EN 62386</b>	Yes
<b>Connection method</b>	Plug-in terminal
<b>Dimming range</b>	1 - 100 %
<b>Mains frequency</b>	50/60 Hz
<b>Mains voltage</b>	220 - 240 V
<b>Total harmonic distortion &lt; %</b>	15 %
<b>Ingress Protection (IP) rating</b>	IP20
<b>Protection rating on room side</b>	IP20
<b>Protection class</b>	I
<b>Impact resistance (IK)</b>	Ik06
<b>Hot wire resistance glow wire test</b>	650 °C
<b>Operating temperature</b>	-20 - 35 °C
<b>Max. Luminaires B10</b>	7
<b>Max. Luminaires B16</b>	12
<b>Max. Luminaires C10</b>	12
<b>Max. Luminaires C16</b>	20
<b>Net length</b>	1482 mm
<b>Net width</b>	45.5 mm
<b>Net height</b>	80 mm

## light distribution curve

