



Mirage - Round

LED Flush Mount Down Light

Lumitec's Mirage LED down lights remain the best-performing down light in the category. Delivering incredible output and a profile that is among the slimmest in the industry. Completely sealed and IP67 rated, Mirage LED down lights are perfectly suited for a variety of indoor or outdoor overhead lighting needs. Output options include architectural-grade High CRI warm white, white/blue/red multi-color, or our full-color Spectrum RGBW; offering nearly infinite output color possibilities.

Specifications:

Lumens:	172-305 (white)
CCT:	3000-5000K
CRI:	70-90+
Voltage:	10-30vDC
Rated Watts:	3-6
IP Rating	IP67
Housing	Stainless Steel Bezel

Key Features:

- Multi-color output options including full-color spectrum.
- Shallow mounting depth with flush mount exterior surface.
- Completely water sealed and IP67 compliant for interior or exterior use.
- Available with three bezel designs, polished, white of just glass.
- Easy Installation – simple 2-wire hook up with clip in place design.
- Over 2,000+ hour of rigorous ASTMB-117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products.

Product Details:

White	Glass	Polished	COLOR OUTPUT	CRI*	CCT*	VOLTAGE	12vdc	24vdc	LUMENS†
113120	113190	113110	White, Red, Blue, Purple, Non Dimming	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
113128	113189	113118	White Dimming, Red, Blue, Non-Dimming	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
113123	113193	113113	White (3PD Dimming)	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
113129	113199	113119	Warm White, Dimming	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
113127	113197	113117	Spectrum (Non 3PD)	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)

* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

Features:



Certifications:



IP Rated



European Conformity

Ph. + (561) 272-9840 | lumiteclighting.com



Beam Pattern:


Mirage - LED Flush Mount Down Light

Mirage- Beam Pattern

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
1.7ft	64.8 fc	2.8 ft	3.0 ft
3.3ft	17.2 fc	5.4 ft	5.7 ft
5.0ft	7.49 fc	8.3 ft	8.7 ft
6.7ft	4.17 fc	11.1 ft	11.7 ft
8.3ft	2.72 fc	13.7 ft	14.4 ft
10.0ft	1.87 fc	16.5 ft	17.4 ft

■ Vert. Spread: 79.1°
■ Horiz. Spread: 82.1°

Illuminance at Distance

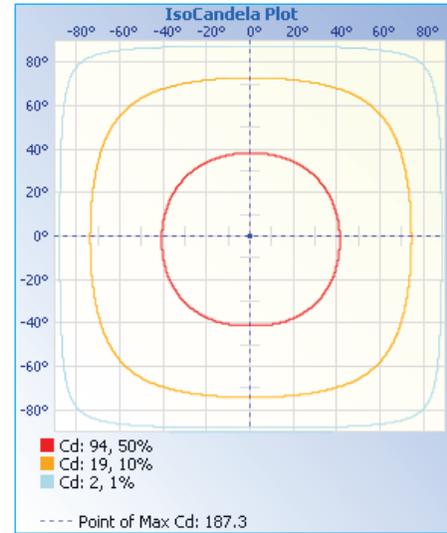

Iso Candela Plot

Dimensions:

Dia: 3.25 in (8.25 cm)
 Depth: 1.00 in (2.54 cm)

