

SPECTRE IP54 CCT LED DOWNLIGHT

PRAGMALUX
PROFESSIONAL LIGHTING



KEY FEATURES

- Professional LED downlight
- CCT Switchable 3000K-4000K-5700K
- UGR<19/UGR<22
- Integrated en external LED driver version
- Very quick and easy installation
- Serial connector
- Possible through-wiring
- Dimmable (only external driver version)
- IP54
- 5 year Pragmalux Warranty

IP54 IK06  650°_{GWT} 107_{LM/W}   60°  90° CRI ≥80

5 PRAGMALUX
YEAR
WARRANTY

DETAILS



External driver version



Reflector

OPTIONS

EM **GST**
18i3/5

ACCESSORIES



Emergency Kit
1000282

SPECIFICATIONS

ITEM CODE	DESCRIPTION	W	LM	LM/W	KELVIN	INPUT CURRENT	LIFETIME L80B10	BEAM ANGLE
4608167	LED Downlight Spectre SR IP54 13W 3000K-5700K 3-CCT Ø145 Cutout Ø125-135mm Triac Dim	13	1120-1310	86-101	3000/4000/5700	0.07	50000	90°
4608174	LED Downlight Spectre SR IP54 18W 3000K-5700K 3-CCT Ø172 Cutout Ø150-165mm Triac Dim	18	1800-1980	100-110	3000/4000/5700	0.09	50000	90°
4608181	LED Downlight Spectre SR IP54 25W 3000K-5700K 3-CCT Ø228 Cutout Ø200-210mm Triac Dim	25	2500-2750	100-110	3000/4000/5700	0.12	50000	90°

TECHNICAL DATA

ELECTRICAL DATA	
Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.9
Operating mode	Integrated/External LED Driver
Electrical connection	Max 3x1,5 mm ² wire
Total harmonic distortion	≤ 20 %

TEMPERATURES & OPERATING CONDITIONS	
Ambient temperature	25°C
Operating temperature	-20 ~ +40°C
Storage temperature	-40 ~ +65°C

COLORS & MATERIALS	
Color (Housing)	White RAL9016
Material (Housing)	PC
Material (Reflector)	PC

CERTIFICATES & STANDARDS	
Driver certificates	CE
Fixture certificates	CE
Ingress protection	IP54
Protection class	II
Protection class IK	06
Glow Wire Test (IEC 695-2-1)	650°C
Photobiological safety group EN62778	RG0

CAPABILITIES	
UGR	≤22(FR) / ≤19(SR)
Dimmable	No / Triac Dim (External driver version)
Type of connection	Push Terminal, 3-pole
LED Module replacable	No
Installation	CCT Switchable

PRAGMALUX

All rights reserved. Pragmalux - PDL Lighting Group B.V. retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors. Luminous flux tolerance: +/- 10%. Power consumption tolerance: +/- 10%.


Version: March 2021

Page 1/2

SPECTRE IP54 CCT LED DOWNLIGHT


ITEM CODE	DESCRIPTION	DRIVER FAILURE RATE AT 5,000H	INRUSH CURRENT IPEAK (A)	INRUSH CURRENT TWIDTH (µs)	MAX. NO. OF DRIVERS ON MCB TYPE B 10A	MAX. NO. OF DRIVERS ON MCB TYPE B 16A	MAX. NO. OF DRIVERS ON MCB TYPE C 10A	MAX. NO. OF DRIVERS ON MCB TYPE C 16A
4608167	LED Downlight Spectre SR IP54 13W 3000K-5700K 3-CCT Ø145 Cutout Ø125-135mm Triac Dim	≤1%	2.18	135	83	138	83	138
4608174	LED Downlight Spectre SR IP54 18W 3000K-5700K 3-CCT Ø172 Cutout Ø150-165mm Triac Dim	≤1%	3.06	224	48	76	48	76
4608181	LED Downlight Spectre SR IP54 25W 3000K-5700K 3-CCT Ø228 Cutout Ø200-210mm Triac Dim	≤1%	4.64	224	33	53	33	53

DIMENSIONS

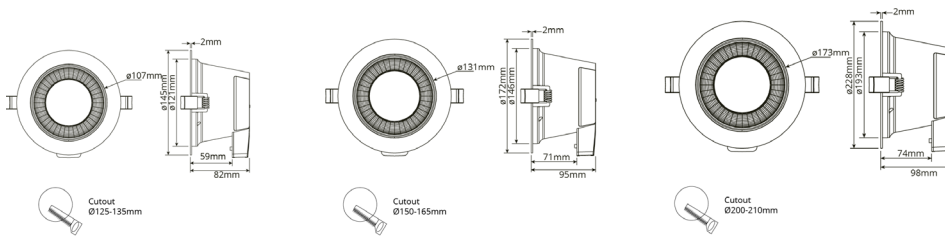


PHOTOMETRIC SPECIFICATIONS

LED DOWNLIGHT SPECTRE SR 13W

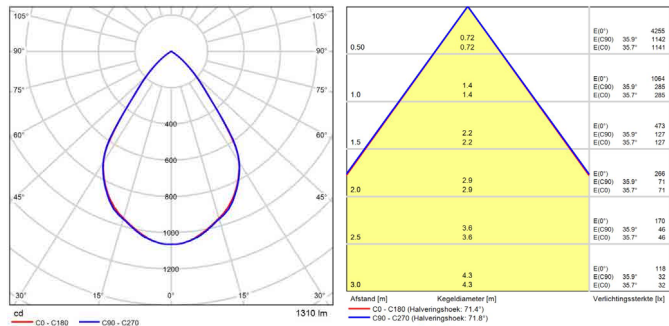

LED DOWNLIGHT SPECTRE SR 18W

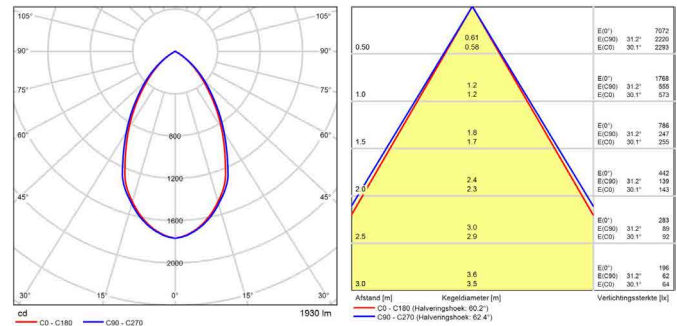

LED DOWNLIGHT SPECTRE SR 25W

