

Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

GreenID LED Panel 60x60



The Norwegian EPD Foundation

Owner of the declaration:
ECOFOSS A/S

Product:
GreenID LED Panel 60x60

Declared unit:
1 pcs

This declaration is based on Product Category

Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
IBU PCR - Part B for luminaires, lamps, and components for luminaires

Program operator:
The Norwegian EPD Foundation

Declaration number:
NEPD-9656-9351

Registration number:
NEPD-9656-9351

Issue date:
09.04.2025

Valid to:
09.04.2030

EPD software:
LCAno EPD generator ID: 828198

General information

Product

GreenID LED Panel 60x60

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-norge.no

Declaration number:

NEPD-9656-9351

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
IBU PCR - Part B for luminaires, lamps, and components for luminaires

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 pcs GreenID LED Panel 60x60

Declared unit with option:

A1, A2, A3, A4, A5, B6, C1, C2, C3, C4, D

Functional unit:

1 lighting system used in an office in Denmark for 10 years, in accordance with the reference PCR.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools. Approval number: NEPDT41.

Third party verifier:

Vito D'Incognito, Take Care International

(no signature required)

Owner of the declaration:

ECOFOSS A/S
Contact person: Loi Pham
Phone: +45 3225 6602
e-mail: lp@sse-as.dk

Manufacturer:

ECOFOSS A/S

Place of production:

ECOFOSS A/S
Mariendalsvej 28,
8800 Viborg, Denmark

Management system:

Organisation no:

Issue date:

09.04.2025

Valid to:

09.04.2030

Year of study:

2024

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2021.09, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD: Emil Pedersen - Nordic LCA

Reviewer of company-specific input data and EPD: Børge Heggen Johansen, Energiråd AS

Approved:



Håkon Hauan, CEO EPD-Norge

Product

Product description:

GreenID LED provides high color rendering and delivers a wide, comfortable light for your home, office, or store. The panel is made with high-quality components, ensuring the same light quality as traditional fixtures but with significantly lower energy consumption.

Product specification

Please visit the product page on our website for more technical information.

Materials	kg	%
Electronic - Cable	0,020	1,31
Electronic - LED strip	0,084	5,50
Electronic - Solder material	0,0020	0,13
Extruded Polystyrene (XPS)	0,38	25,44
Metal - Aluminium	0,29	19,40
Metal - Stainless steel	0,70	46,49
Paint, water-based	0,026	1,70
Total	1,52	100,00

Packaging	kg	%
Packaging - Paper	0,50	100,00
Total incl. packaging	2,03	100,00

Technical data:

The panels are only 9 mm high and 5 mm narrower in width for a perfect fit with ceiling modules. The silver frame and back are made of 6063 aluminum.

Constructional data	Value	Unit
Width x length	545*545	mm
Luminous energy	4455	lm s
Luminous flux	4455	lm
Luminous intensity	2222	cd
Luminance	1821	cd/m ²
Illuminance	136	lx
Luminous emittance	2723	lx
Luminous efficiency	118,96	lm/W
Nonglaring	17.9/18.6	-
Light distribution	1839	cd

Market:

Denmark and other nordic countries.

Reference service life, product

10 years lifetime for the installation according to the used scenario.

Reference service life, building or construction works

60 years. Standard service life for buildings according to PCR Part A of EPD Norway.

LCA: Calculation rules

Declared unit:

1 pcs GreenID LED Panel 60x60

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) can be excluded. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Electronic - Cable	Ecoinvent 3.6	Database	2019
Electronic - LED strip	Supplier	EPD	
Electronic - Solder material	ecoinvent 3.6	Database	2019
Extruded Polystyrene (XPS)	Ecoinvent 3.6	Database	2019
Metal - Aluminium	ecoinvent 3.6	Database	2019
Metal - Aluminium	Modified ecoinvent 3.6	Database	2019
Metal - Stainless steel	ecoinvent 3.6	Database	2019
Packaging - Paper	ecoinvent 3.6	Database	2019
Paint, water-based	ecoinvent 3.6	Database	2019

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	X	MND	X	X	X	X	X

System boundary:


The analysis is a cradle-to-grave study of a single luminaire, encompassing its manufacturing, installation, use according to a specific lighting regime and lifespan, and waste treatment at the end of its life.

A1-A5: This phase covers the extraction and production of raw materials, transportation to the production site, the manufacturing process, transport to the market, and assembly.

B6: This phase represents the operational energy use of the luminaire, based on a defined usage scenario.

C1-C4: This phase includes the de-installation of the luminaire, average transport from the building site to the waste treatment facility, waste processing, and disposal.

D: This module evaluates the recyclability of metals and plastics, granting producers a credit for the net scrap generated at the product's end of life. Benefits from recycling are calculated according to the formula in EN 15804:2012+A2:2019. Additionally, the substitution of heat and electricity produced through the energy recovery of plastic insulation and other components is included in this module.

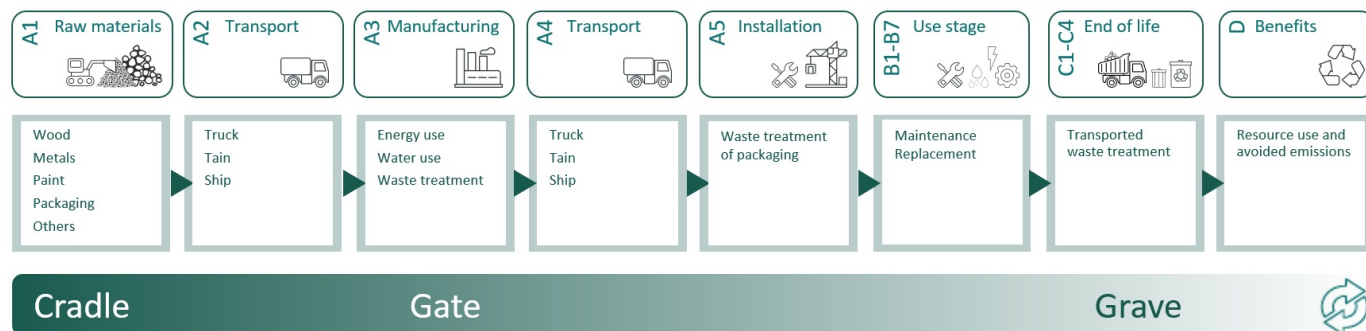

Additional technical information:

Please visit our website www.ecofoss.dk for more technical information.

Constructional data	Value	Unit
Width x lenght	545*545	mm

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Module A1-A3: The product stage consist of raw materiale extraction and production, transport to manufacturing sit in China, production of packaging material and energy consumption, and assembly of the lighting panel.

Module A4: Transport from manufacturing location in China to warehouse in Denmark and average distribution into the Nordic market.

Module A5: The assembly during the construction installation stage is carried out manually using hand tools, resulting in minimal energy consumption. The packaging cardboard is transported to a waste treatment facility.

Module B6: The operational energy use of the luminaire is calculated based on the methodology provided in IBU PCR Part B for luminaires, lamps, and components for luminaires. To calculate the electricity use of the luminaire, the following scenario parameters have been applied:

- User scenario = Office
- Active power of the luminaire (Pa) = 32 watt
- Passive power of the luminaire (Pp) = 4 watt
- Daylight time usage (tD) = 2250 hours
- Non-daylight time usage (tN) = 288 hours
- Standard year time (ty) = 8760 hours
- The occupancy depany factor (FO) = 1 (factor, no unit)
- The daylight dependency factor (FD) = 0,9 (factor, no unit)
- The product specific constant illuminance factor (FCP) = 1 (factor, no unit)
- The non-daylight dimming factor (FN) = 1 (factor, no unit)
- The application specific empiric lifetime of the luminaire in years (a) = 10 years (corresponding to the reference service life of the product)

Module C2: Average transport to Nordic waste treatment facilities.

Modules C3 and C4: Waste treatment of the product. Waste treatments in C3 include material recycling and incineration with and without energy recovery and fly ash extraction. Disposal in C4 consist of landfilling of different waste fractions and of ashes.

Module D: The recyclability of metals, plastics, and electronic components allows the producers a credit for the net scrap that is produced at the end of a product's life. The benefits from recycling of net scrap are described in formula from EN 15804:2012+A2:2019. Substitution of heat and electricity generated by the incineration with energy recovery of plastic insulation and other parts is also calculated in module D.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Ship, Freight, Transoceanic (kgkm)	65,0 %	19119	0,003	l/tkm	57,36
Truck, unspecified (kgkm) - RER	48,7 %	500	0,051	l/tkm	25,50
Truck, unspecified (kgkm) - RER	48,7 %	69	0,051	l/tkm	3,50
Truck, unspecified (kgkm) - RoW	48,7 %	34	0,051	l/tkm	1,71
Assembly (A5)	Unit	Value			
Waste, packaging, kraft paper, unbleached, to average treatment (kg) - A5, inkl. 85 km transp.	kg	0,50			
Operational energy (B6)	Unit	Value			
Electricity, Denmark (kWh)	kWh	1090,60			
Transport to waste processing (C2)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, unspecified (kgkm) - RER	48,7 %	300	0,051	l/tkm	15,30
Waste processing (C3)	Unit	Value			
Balancing waste - Biogenic carbon in product (kg) - (Type 4)	kg	0,70			
Waste treatment per kg Non-hazardous waste, incineration with fly ash extraction - C3 (kg)	kg	1,52			
Balancing waste - NRPM (MJ) - (Type 4)	MJ	16,36			
Disposal (C4)	Unit	Value			
Landfilling of ashes from incineration of Non-hazardous waste, process per kg ashes and residues - C4 (kg)	kg	0,36			
Benefits and loads beyond the system boundaries (D)	Unit	Value			
Substitution of District heating, Denmark (MJ)	MJ	13,70			
Substitution of Electricity, Denmark (kWh)	kWh	0,90			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact							
Indicator	Unit	A1	A2	A3	A4	A5	
GWP-total	kg CO ₂ -eq	2,55E+01	4,73E-02	1,01E+00	3,96E-01	8,81E-01	
GWP-fossil	kg CO ₂ -eq	2,62E+01	4,72E-02	1,01E+00	3,96E-01	8,09E-03	
GWP-biogenic	kg CO ₂ -eq	-7,04E-01	1,91E-05	1,54E-04	1,27E-04	8,73E-01	
GWP-luluc	kg CO ₂ -eq	2,96E-02	1,72E-05	1,15E-04	2,33E-04	2,68E-06	
ODP	kg CFC11 -eq	1,31E-06	1,04E-08	2,42E-08	8,59E-08	1,71E-09	
AP	mol H ⁺ -eq	1,76E-01	2,69E-04	5,38E-03	9,61E-03	3,83E-05	
EP-FreshWater	kg P -eq	2,17E-03	4,53E-07	2,02E-05	2,14E-06	6,64E-08	
EP-Marine	kg N -eq	2,78E-02	9,45E-05	1,21E-03	2,44E-03	1,27E-05	
EP-Terrestrial	mol N -eq	3,09E-01	1,04E-03	1,33E-02	2,71E-02	1,37E-04	
POCP	kg NMVOC -eq	8,99E-02	2,97E-04	3,51E-03	7,10E-03	3,94E-05	
ADP-minerals&metals ¹	kg Sb-eq	8,70E-04	1,19E-06	2,40E-06	5,17E-06	1,97E-07	
ADP-fossil ¹	MJ	3,03E+02	7,09E-01	9,34E+00	5,37E+00	1,13E-01	
WDP ¹	m ³	4,46E+02	2,43E-01	7,17E-01	2,40E+00	1,43E-01	

Indicator	Unit	B6	C1	C2	C3	C4	D
GWP-total	kg CO ₂ -eq	3,69E+02	0	6,03E-02	4,28E+00	1,00E-03	-6,51E-01
GWP-fossil	kg CO ₂ -eq	3,65E+02	0	6,02E-02	3,57E+00	1,00E-03	-6,46E-01
GWP-biogenic	kg CO ₂ -eq	3,78E+00	0	2,58E-05	7,04E-01	0,00E+00	-1,33E-03
GWP-luluc	kg CO ₂ -eq	4,91E-01	0	2,13E-05	5,99E-05	3,08E-07	-7,57E-04
ODP	kg CFC11 -eq	1,24E-05	0	1,37E-08	2,36E-08	3,36E-10	-2,36E-08
AP	mol H ⁺ -eq	1,46E+00	0	3,43E-04	5,09E-04	7,34E-06	-4,07E-03
EP-FreshWater	kg P -eq	2,98E-02	0	4,95E-07	2,36E-06	1,01E-08	-4,06E-05
EP-Marine	kg N -eq	2,46E-01	0	1,23E-04	1,90E-04	2,61E-06	-6,69E-04
EP-Terrestrial	mol N -eq	3,51E+00	0	1,35E-03	1,89E-03	2,88E-05	-9,31E-03
POCP	kg NMVOC -eq	7,48E-01	0	3,87E-04	4,64E-04	8,34E-06	-2,04E-03
ADP-minerals&metals ¹	kg Sb-eq	3,25E-03	0	1,56E-06	9,46E-07	1,78E-08	-3,70E-06
ADP-fossil ¹	MJ	4,73E+03	0	9,24E-01	6,13E-01	2,45E-02	-7,64E+00
WDP ¹	m ³	7,34E+04	0	8,76E-01	-1,04E+01	4,67E-02	-7,56E+01

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption







"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"







*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

Additional environmental impact indicators

Indicator	Unit	A1	A2	A3	A4	A5
 PM	Disease incidence	1,74E-06	4,14E-09	7,80E-08	1,10E-08	5,65E-10
 IRP ²	kgBq U235 -eq	7,87E-01	2,95E-03	9,80E-03	2,31E-02	4,84E-04
 ETP-fw ¹	CTUe	1,11E+03	5,76E-01	2,50E+01	3,44E+00	1,51E-01
 HTP-c ¹	CTUh	8,38E-08	0,00E+00	2,46E-10	0,00E+00	5,00E-12
 HTP-nc ¹	CTUh	8,20E-07	6,91E-10	1,07E-08	1,84E-09	1,90E-10
 SQP ¹	dimensionless	1,93E+02	5,95E-01	1,85E+00	2,06E+00	7,59E-02

Indicator	Unit	B6	C1	C2	C3	C4	D
 PM	Disease incidence	7,16E-06	0	5,49E-09	2,87E-09	1,35E-10	-3,47E-08
 IRP ²	kgBq U235 -eq	2,31E+01	0	4,04E-03	2,39E-03	9,91E-05	-2,55E-02
 ETP-fw ¹	CTUe	8,41E+03	0	6,91E-01	9,39E+00	2,56E-02	-2,09E+01
 HTP-c ¹	CTUh	1,66E-07	0	0,00E+00	2,93E-10	1,00E-12	-2,89E-10
 HTP-nc ¹	CTUh	5,50E-06	0	9,15E-10	6,21E-09	4,90E-11	-9,56E-09
 SQP ¹	dimensionless	7,77E+03	0	7,91E-01	1,23E-01	3,42E-02	-3,46E+01

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use							
Indicator		Unit	A1	A2	A3	A4	A5
	PERE	MJ	4,48E+01	8,18E-03	8,30E-01	5,00E-02	1,86E-03
	PERM	MJ	7,06E+00	0,00E+00	0,00E+00	0,00E+00	-7,06E+00
	PERT	MJ	5,19E+01	8,18E-03	8,30E-01	5,00E-02	-7,06E+00
	PENRE	MJ	2,86E+02	7,09E-01	9,34E+00	5,37E+00	1,13E-01
	PENRM	MJ	1,64E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PENRT	MJ	3,03E+02	7,09E-01	9,34E+00	5,37E+00	1,13E-01
	SM	kg	2,21E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	2,97E-01	1,68E-04	4,25E-04	1,50E-03	6,18E-05
	NRSF	MJ	5,82E-02	1,30E-03	6,14E-03	1,14E-02	2,55E-04
	FW	m ³	2,28E-01	8,37E-05	2,34E-03	3,93E-04	5,34E-05

Indicator		Unit	B6	C1	C2	C3	C4	D
	PERE	MJ	4,06E+03	0	1,33E-02	5,97E-02	4,44E-04	-9,65E+00
	PERM	MJ	0,00E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PERT	MJ	4,06E+03	0	1,33E-02	5,97E-02	4,44E-04	-9,65E+00
	PENRE	MJ	4,73E+03	0	9,24E-01	7,70E-01	2,46E-02	-7,64E+00
	PENRM	MJ	0,00E+00	0	0,00E+00	-1,64E+01	0,00E+00	0,00E+00
	PENRT	MJ	4,73E+03	0	9,24E-01	-1,56E+01	2,46E-02	-7,64E+00
	SM	kg	0,00E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	1,53E+02	0	4,72E-04	1,50E-03	1,14E-05	-1,55E-01
	NRSF	MJ	8,08E-01	0	1,66E-03	0,00E+00	0,00E+00	-1,95E-03
	FW	m ³	1,51E+01	0	1,05E-04	1,07E-03	2,27E-05	-1,54E-02

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

End of life - Waste

Indicator		Unit	A1	A2	A3	A4	A5
	HWD	kg	1,86E-01	6,33E-05	7,01E-04	2,53E-04	0,00E+00
	NHWD	kg	7,29E+00	4,34E-02	7,58E-02	1,23E-01	5,00E-01
	RWD	kg	6,54E-04	4,65E-06	1,19E-05	3,70E-05	0,00E+00

Indicator		Unit	B6	C1	C2	C3	C4	D
	HWD	kg	6,25E-01	0	4,98E-05	0,00E+00	3,10E-01	-1,40E-03
	NHWD	kg	2,88E+01	0	5,73E-02	1,53E+00	5,13E-02	-4,55E-02
	RWD	kg	1,49E-02	0	6,29E-06	0,00E+00	5,83E-07	-6,82E-06

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

End of life - Output flow

Indicator		Unit	A1	A2	A3	A4	A5
	CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	MFR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,65E-01
	MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,50E-02
	EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,86E-02
	EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,33E-01

Indicator		Unit	B6	C1	C2	C3	C4	D
	CRU	kg	0,00E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	MFR	kg	0,00E+00	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	MER	kg	0,00E+00	0	0,00E+00	1,53E+00	0,00E+00	0,00E+00
	EEE	MJ	0,00E+00	0	0,00E+00	5,29E-04	0,00E+00	0,00E+00
	EET	MJ	0,00E+00	0	0,00E+00	8,00E-03	0,00E+00	0,00E+00

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

Biogenic Carbon Content

Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in accompanying packaging	kg C	2,37E-01

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, China (kWh)	ecoinvent 3.6	1102,91	g CO ₂ -eq/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products							
Indicator	Unit	A1	A2	A3	A4	A5	
GWPIOBC	kg CO ₂ -eq	2,63E+01	4,73E-02	9,53E-01	3,96E-01	8,09E-03	
Indicator	Unit	B6	C1	C2	C3	C4	D
GWPIOBC	kg CO ₂ -eq	5,10E+02	0	6,03E-02	1,93E+00	4,08E-03	-7,69E-01

GWPIOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Bibliography

ISO 14025:2010. Environmental labels and declarations - Type III environmental declarations - Principles and procedures. International Organization for Standardization.

ISO 14044:2006. Environmental management - Life cycle assessment - Requirements and guidelines. International Organization for Standardization.

EN 15804:2012+A2:2019. Environmental product declaration - Core rules for the product category of construction products. European Committee for Standardization.

ISO 21930:2017. Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products. International Organization for Standardization.

EN 50693:2019. Product category rules for life cycle assessments of electronic and electrical products and systems. European Committee for Standardization.






Ecoinvent v3, 2019. Allocation, cut-off by classification. Swiss Centre of Life Cycle Inventories.

Iversen et al., (2021). eEPD v2021.09, background information for EPD generator tool system verification, LCA.no. Report number: 07.21. System verification report.

Philis et al., (2022). EPD generator for IBU PCR part B for luminaires, lamps, and components for luminaires, background information for EPD generator application and LCA data, LCA.no. Report number: 04.22. PCR verification report.

EPD Norway (2022). NPCR Part A: Construction products and services. The Norwegian EPD foundation. Version 2.0 published 24.03.2021.

IBU (2017). PCR part B for luminaires, lamps and components for luminaires. Institut Bauen und Umwelt e.V. Version 1.7, published 30.11.2017.

 epd-norge Global program operator	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration: ECOFLOSS A/S Mariendalsvej 28,, 8800 Viborg, Denmark	Phone: +45 3225 6602 e-mail: lp@sse-as.dk web:
	Author of the Life Cycle Assessment LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal